



Specifications:

1. Current Rating : 0.5A AC/DC
2. Voltage Rating : 50V AC/DC
3. Contact Resistance : 30m ohm. max.
4. Insulation Resistance : 100M ohm. min.at 100V DC
5. Withstanding Voltage : 100V AC for one minute
6. Operating Temperature Range : -20°C to +105°C

- Material and Plated
- 1.Housing :High Temp. Plastic (LCP UL94V-0)  
Color :White
  - 2.Contact : Phosphor Bronze
  - 3.Plated : Gold Plated

How To Order

BBP0635-40G-620-CR

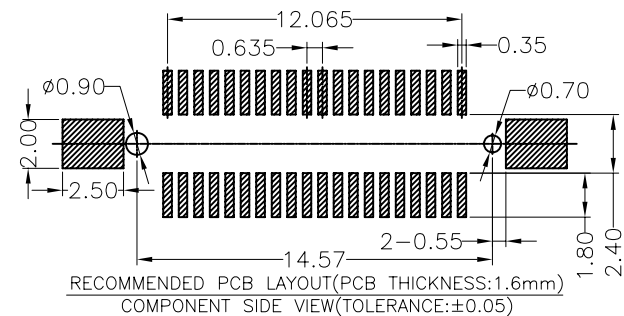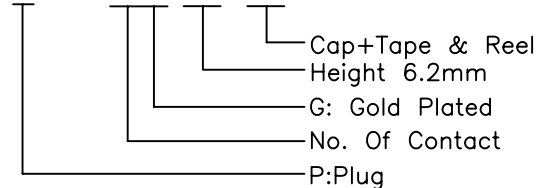

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 0.635mm Board To Board Plug 6.2mm Height SMT Type	SIZE <b>A4</b>
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	PART NO: BBP0635-40G-620-CR		
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1			
A	08-SEP-2013	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					