

Specifications


Current Rating: 1.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 30m ohm. Max
 Insulation Resistance: 1000Mohm min
 Withstanding Voltage: 250V(r.m.s) For one Minute
 Operating Temperature Range: -40°C to 85°C

Materials:
 Insulator: High Temp. Plastic (LCP UL94V-0)
 Color: Natural Color
 Contact: Phosphor Bronze
 Plated: Contact Gold Plated
 Solder Tail Gold Plated

How To Order:

BBS10-XXX-330-PN


PN: Without Post
 Total Height
 G: Gold Plated
 T: Tin Plated
 No. of Positions
 S: Socket

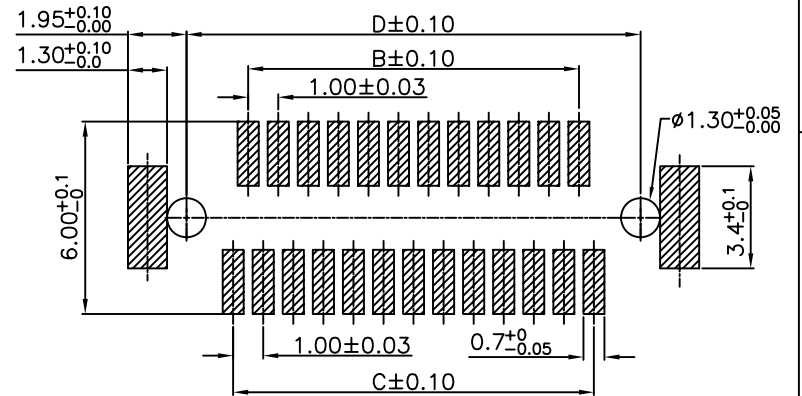

Pin No	A	B	C	D	Pin No	A	B	C	D
09	8.30	3.00	4.00	10.1	21	14.30	9.00	10.00	16.1
11	9.30	4.00	5.00	11.1	23	15.30	10.00	11.00	17.1
13	10.30	5.00	6.00	12.1	25	16.30	11.00	12.00	18.1
15	11.30	6.00	7.00	13.1	31	19.30	14.00	15.00	21.1
17	12.30	7.00	8.00	14.1	41	24.30	19.00	20.00	26.1
19	13.30	8.00	9.00	15.1	51	29.30	24.00	25.00	31.1

PCB LAYOUT

RoHS Compliant



F				
E				
D				
C				
B				
A	10-Mar-2022	(PC0001)	Ken	
REV	DATE	FILE	BY	

DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15
CHECKED: Lily Chou	
APPROVAL: Chao Peng	UNIT: MM
	SCALE: 1:1
	SHEET: 1 / 1
	PROJECTION:

		DESCRIPTION: 1.0mm Board To Board Plug 3.3mm Height	SIZE A4
PART NO: BBP10-XXX-330-PN			