


Specifications:
 Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1,000M ohm. Min.
 Withstanding Voltage:600V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Material and Finish
 Insulator:High Temp.Plastic (Nylon 6T UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Finish:Gold Plated
 How To Order
 BHSM254-XXG-CR
 CR:Cap+Tape& Reel
 Gold Plated
 No.of Positions
 SMT Type

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B
6	15.28	5.08	14	25.44	15.24	26	40.68	30.48
8	17.82	7.62	16	27.98	17.78	30	45.76	35.56
10	20.36	10.16	20	33.06	22.86	34	50.84	40.64
12	22.90	12.70	24	38.14	27.94	40	58.46	48.26

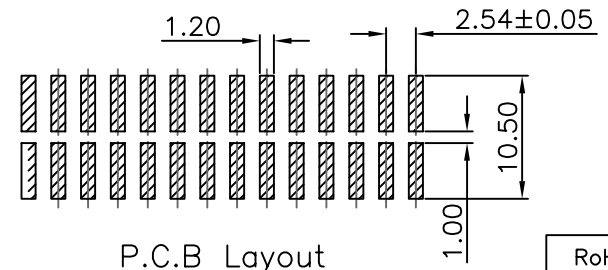

RoHS Compliant

			DRAWN: WGL		GENERAL TOLERANCE: .X=±0.2 .XX=±0.15				DESCRIPTION: 2.54mm Box Header SMT Type		SIZE A4	
			CHECKED: Jeremy Liu		UNIT: MM SCALE:2:1							
			APPROVAL: Mike Wu		SHEET: 1 / 1		PART NO: BHSM254-XXG-CR					
REV	DATE	FILE	BY			PROJECTION:						