


Dimension Information:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
10	8.00	14.30	28	26.00	32.30
12	10.00	16.30	30	28.00	34.30
14	12.00	18.30	34	32.00	38.30
16	14.00	20.30	40	38.00	44.30
18	16.00	22.30	44	42.00	48.30
20	18.00	24.30	50	48.00	54.30
24	22.00	28.30			
26	24.00	30.30			



Specifications:

Current rating:1.0A AC,DC
 Voltage rating:30V AC, DC
 Contact resistance:20m ohm Max
 Insulation resistance:1,000M ohm Min
 Withstanding voltage:500V AC/minute
 Operating Temperature:-40°C ~ +105°C


Material:

Insulator:PBT UL94V-0
 Color:Black
 Contact:Copper Alloy
 Plating:Selective Gold Plated

How To Order

IDC20-XX

No. of Contacts

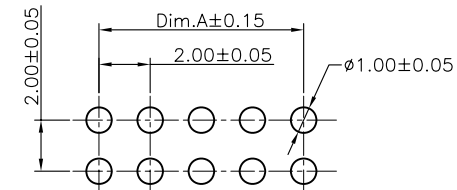

Recommended P.C.B Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 2.0MM Flat Cable IDC Socket With Strain Relief	SIZE A4
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: IDC20-XX		
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1			
A	01-SEP-2009	(PC0001)	Ken		PROJECTION:			
REV	DATE	FILE	BY					