






1

2

3

4

5

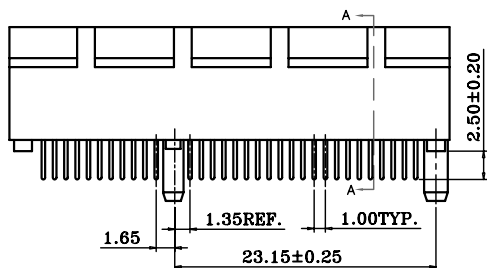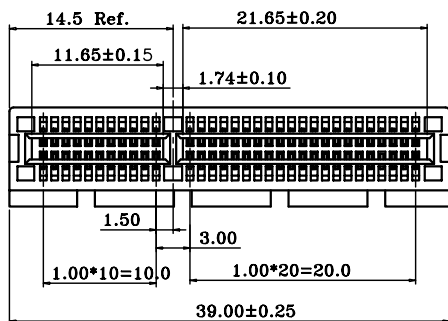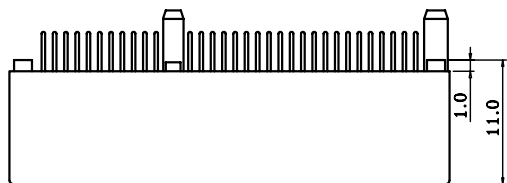

Electric Specifications

Current Rating:3.0Amps

Rating Voltage: 250V AC

Insulation Resistance:100M Ohm Min At DC 500V

Contact Resistance:30m Ohm Max At DC 100m Amps

Withstanding Voltage:1 Minute At 750V r.m.s Min

Temperature Range:-40°C~85°C

Materials:

Insulator:High Temp. Plastic (Nylon 46 UL94V-0)



Insulator Color:Balck

Terminal :Copper Alloy

Plating:Tin Plated

How To Order

PCIEV10-64-PG

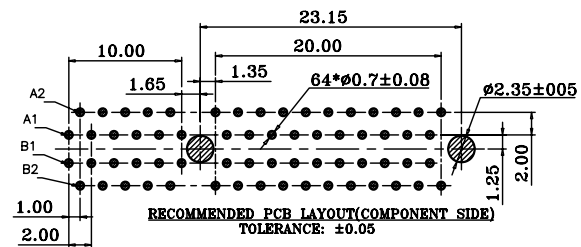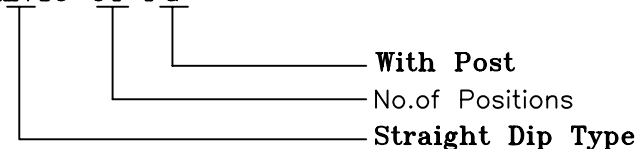

RoHS Compliant

				DRAWN: WGL	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15			
E				CHECKED: Jeremy Liu	UNIT: MM			DESCRIPTION: PCI-E 64P Straight DIP type with POST (X4)
D				APPROVAL: Mike Wu	SCALE:2:1	PART NO: PCIEV10-64-PG	A4	
C					SHEET: 1 / 1			
B					PROJECTION:			
A	14-Jul-2018	(PC0001)	WGL					
REV	DATE	FILE	BY					

A

B

C

D