





1

2


3

4




5

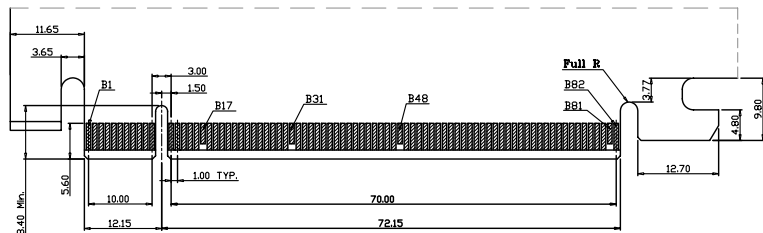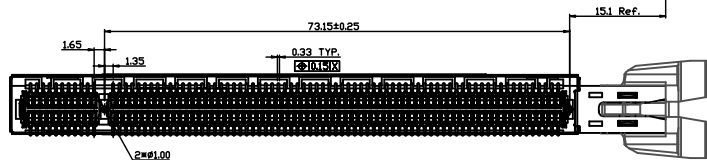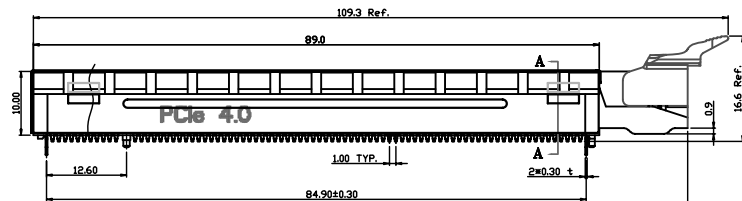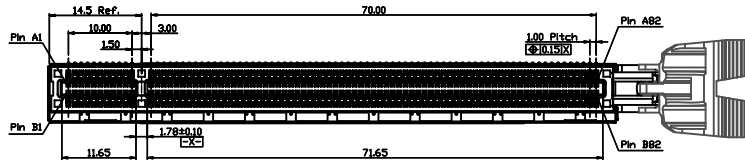

RECOMMENDED EDGE CARD PATTERN(PRIMARY SIDE)

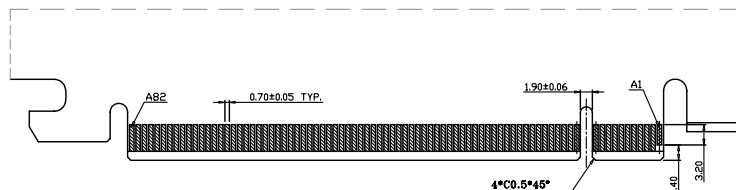

RECOMMENDED EDGE CARD PATTERN(SECONDARY SIDE)




Electric Specifications
 Current Rating:1.1Amps
 Rating Voltage: 250V AC
 Insulation Resistance:100M Ohm Min At DC 500V
 Contact Resistance:30m Ohm Max At DC 100m Amps
 Withstanding Voltage:1 Minute At 750V r.m.s Min
 Temperature Range:-40°C~85°C
 Materials:

Insulator:High Temp. Plastic (LCP UL94V-0)
 Insulator Color:Balck
 Terminal :Copper Alloy
 Plating:Selective Gold Plated

How To Order

PCIEVSM10-164GX-CKS

- Central Latch+Shell
- Blank Selective Gold Plated 1u"
- G5:Selective Gold Plated 5u"
- G15:Selective Gold Plated 15u"
- SMT Type

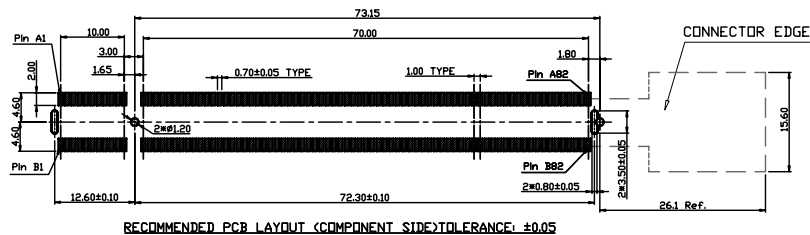

RoHS Compliant

				DRAWN: WGL	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15			SIZE A4
E				CHECKED: Jeremy Liu	UNIT: MM			
D				APPROVAL: Mike Wu	SCALE:2:1	PART NO: PCIEVSM10-164GX-CKS		
C					SHEET: 1 / 1			
B					PROJECTION:			
A	27-Aug-2022	(PC0001)	WGL					
REV	DATE	FILE	BY					

A

B

C

D