


Specifications:
 Current Rating:1.0 Amps
 Voltage Rating:50V AC/DC
 Contact Resistance:20mohm max.
 Insulation Resistance:1,000M ohm min.
 Withstanding Voltage:500V For One Minute
 Operating Temperature:-25°C ~ +105°C
 Material

Insulator:High Temp.Plastic(Nylon 6T UL94V-0)
 Standard Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated

How To Order

PHDISM10-XXG-19122-CP

Cap+Tube
 Length
 G:Gold Plated
 No. of Positions
 Double Insulator SMT Type

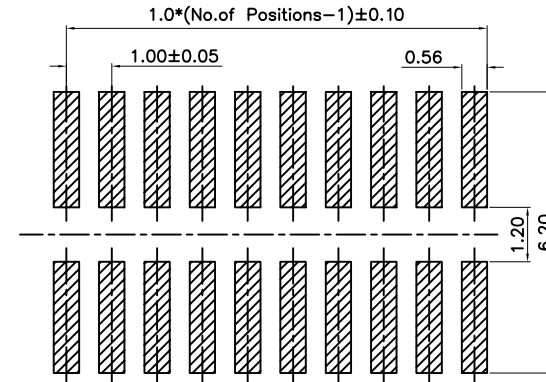

PCB Layout
 (PCB Tolerance ±0.05)

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 1.0mm Pin Header SMT Type Double Insulator	SIZE A4
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM	PART NO:			
C			Lily Chou	SCALE: 1:1	PHDISM10-XXG-19122-CP			
B			APPROVAL:	SHEET: 1 / 1				
A	08-May-2017	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					