

1

2

3

4

5

Specifications:

Current Rating:1.0 Amps

Voltage Rating:50V AC/DC

Contact Resistance:20mohm max.

Insulation Resistance:1,000M ohm min.

Withstanding Voltage:500V For One Minute

Operating Temperature:-25°C ~ +105°C

Material

Insulator:High Temp.Plastic(Nylon 6T UL94V-0)

Standard Color:Black

Contact:Copper Alloy

Plating:Gold Plated

How To Order

PHDSM10-XXG-3533-CR





Cap+Tape &Reel

Length

G:Gold Plated



No. of Positions

SMT Type

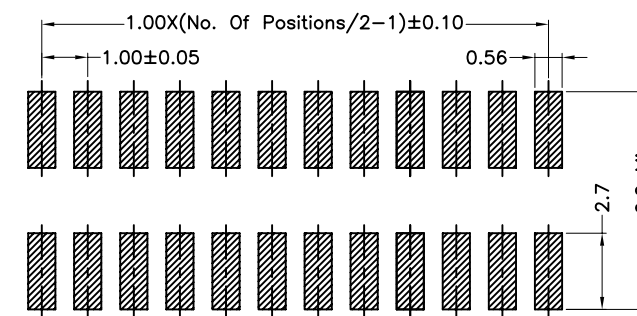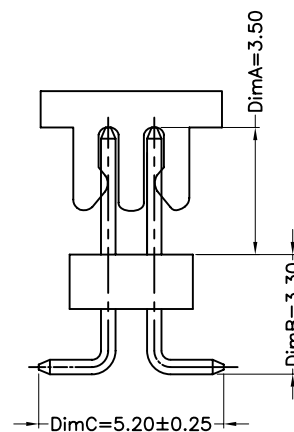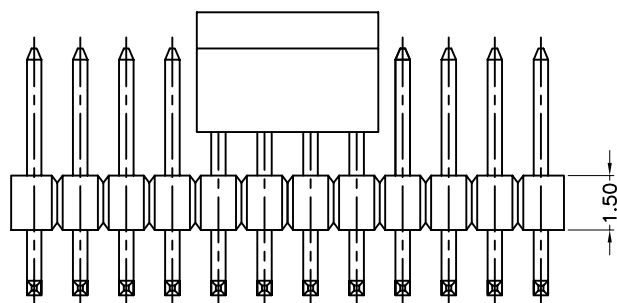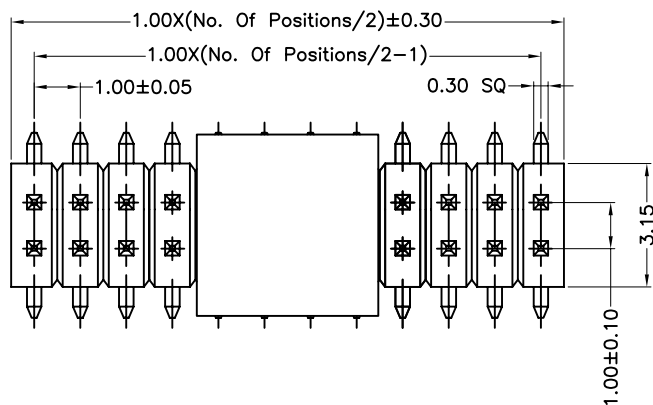

P.C.B Layout

RoHS Compliant

| | | | | | | | | |
|-----|-------------|----------|-----|-----------|---|---|--|---------------------|
| F | | | | DRAWN: | GENERAL TOLERANCE: |  | | SIZE |
| E | | | | Ken | .X=±0.20 .XX=±0.15 | | | |
| D | | | | CHECKED: | UNIT: MM | DESCRIPTION: | | A4 |
| C | | | | Lily Chou | SCALE: 1:1 | | | |
| B | | | | APPROVAL: | SHEET: 1 / 1 | PART NO: | | |
| A | 08-May-2017 | (PC0001) | Ken | Chao Peng | PROJECTION: | | | PHDSM10-XXG-3533-CR |
| REV | DATE | FILE | BY | |  | | | |