
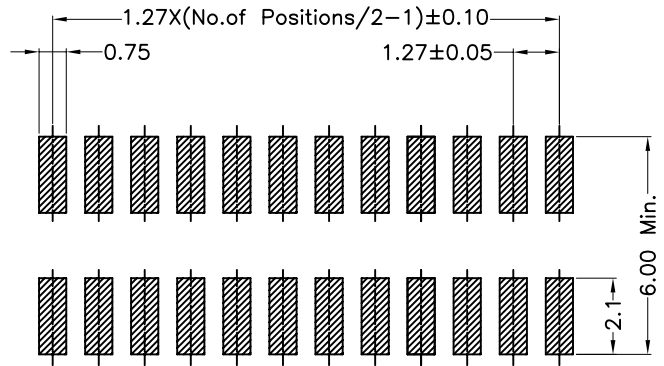

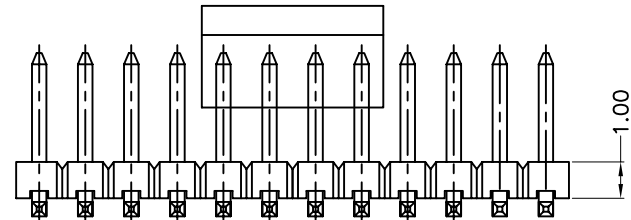


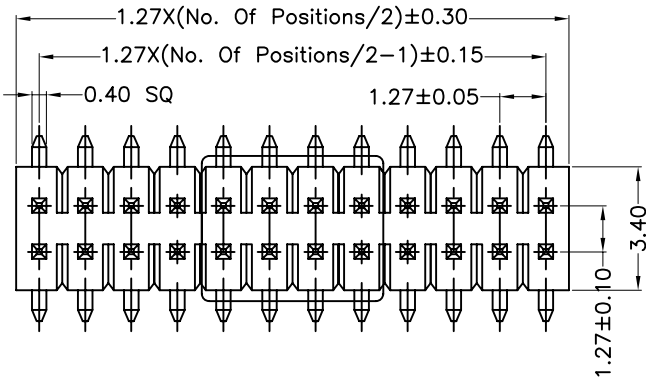


PCB Layout

Specifications:
 Current Rating:1.0 Amps
 Voltage Rating:50V AC/DC
 Contact Resistance:20mohm max.
 Insulation Resistance:1,000M ohm min.
 Withstanding Voltage:500V For One Minute
 Operating Temperature:-25°C ~ +105°C
 Material
 Insulator:High Temp.Plastic(Nylon 6T UL94V-0)
 Standard Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated
 How To Order
 PHDSM127-XXG-3015CR

CR:Cap+Tape & Reel
 Length
 G:Gold Plated
 No. of Positions
 Double Rows SMT Type

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		
E							
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 1.27mm Pin Header SMT Type	SIZE A4
C					SCALE: 1:1		
B				APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: PHDSM127-XXG-3015CR	
A	19-Jun-2019	(PC0001)	Ken		PROJECTION: 		
REV	DATE	FILE	BY				