


**1.27mm Pin Header Double Rows Straight Dip Type.**

PHVD127-XXG-XX


- Special Length
- No. Of Contacts (4 To 80 Ways)
- 1.27mm Straight Double
- VD: Straight Double row Type
- RD: R/A Double Row Type
- DI: Double Insulator Type

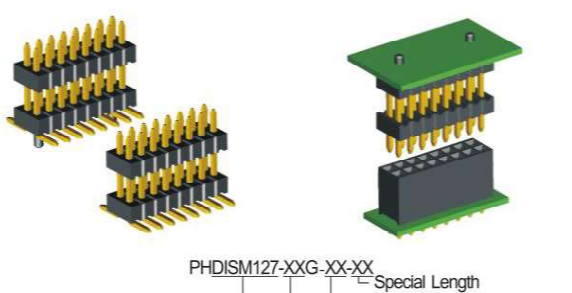

**1.27mm Pin Header Double Rows SMD Type.**

PHDISM127-XXG-XX-XX


- Special Length
- Blank: Standard
- PG: With Peg
- 1.27mm Straight
- No. Of Contacts
- DISM: Double Insulator SMT Type

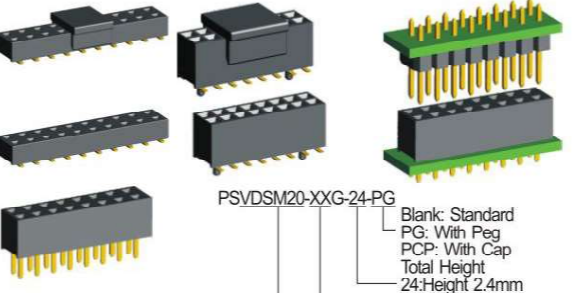

**2.00mm PCB Socket Double Rows Straight Dip Type(H=4.3).**

PSVDISM20-XXG-24-PG


- Blank: Standard
- PG: With Peg
- PCP: With Cap
- Total Height
- 24: Height 2.4mm
- 45: Height 4.5mm
- 635: Height 6.35mm
- No. Of Contacts (4 To 80 Ways)
- VD: Straight Double Row Type
- DSM: SMT Double Row Type



**2.00mm Mini Jumper.**

MJ20XX


- CG: 3.50mm Height Open Type;
- BG: 5.00mm Height Close Type.

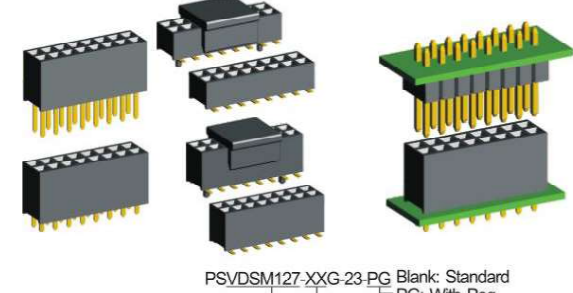

**1.27mm PCB Socket Double Rows Straight Dip Type(H=4.5).**

PSVDISM127-XXG-23-PG


- Blank: Standard
- PG: With Peg
- No. Of Contacts (4 To 80 Ways)
- 1.27mm Straight
- VD: Straight Double row Type
- DSM: SMT Double row Type

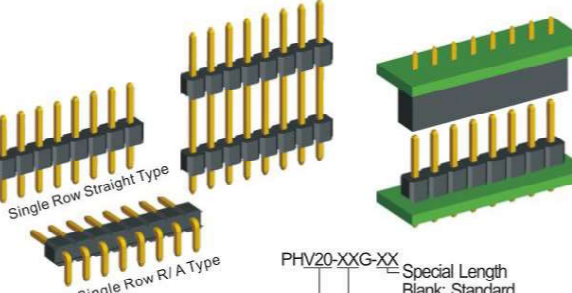

**2.00mm Pin Header Single Row Straight Dip Type.**

PHV20-XXG-XX


- Special Length
- Blank: Standard
- No. Of Contacts (2 To 40 Ways)
- V: Straight Single row Type
- R: R/A Single Row Type
- I: Double Insulator Type

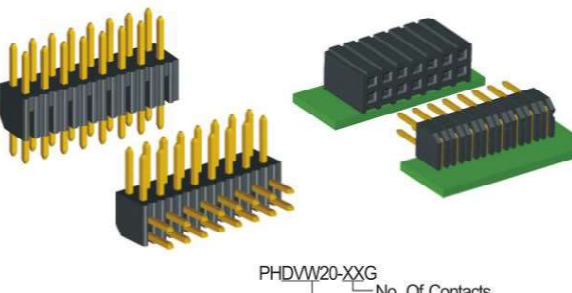

**2.00mm Wide Body Header Double Rows Straight Dip Type.**

PHDWW20-XXG


- No. Of Contacts (4 To 80 Ways)
- DVW: Straight Double Row Type
- RD: R/A Double Row Type

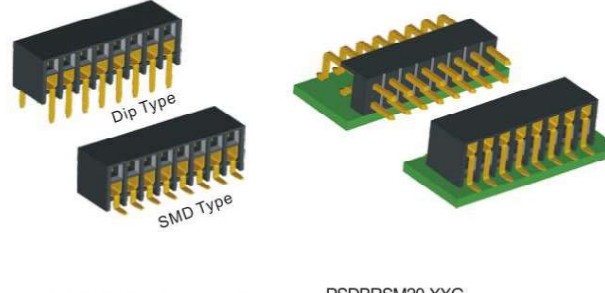

**2.00mm PCB Socket Double Rows Horizontal Entry SMD Type.**

PSDBRSM20-XXG


- No. Of Contacts (4 To 80 Ways)
- Blank: Dip Type
- SM: SMT Type
- Horizontal Entry

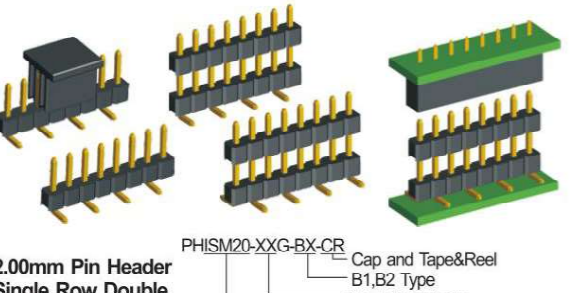

**2.00mm Pin Header Single Row Double Insulator SMD Type.**

PHISM20-XXG-BX-CR


- Cap and Tape&Reel B1,B2 Type
- No. Of Contacts (2 To 40 Ways)
- 2.0mm Double Insulator
- SM: SMT Single Row Type
- ISM: Double Insulator SMT Type

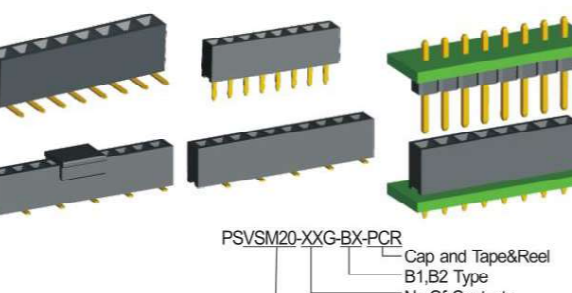

**2.00mm PCB Socket Single Row Straight Dip Type(H=4.3).**

PSVSM20-XXG-BX-PCR


- Cap and Tape&Reel B1,B2 Type
- No. Of Contacts (2 To 40 Ways)
- V: Straight Single row Type
- R: R/A Single Row Type
- SM: SMT Single Row Type

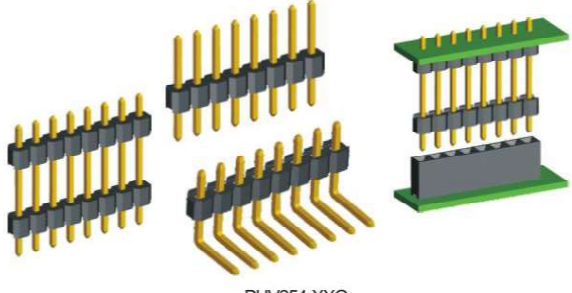

**2.54mm Pin Header Single Row Straight Dip Type.**

PHV254-XXG


- No. Of Contacts (2 To 40 Ways)
- V: Straight Single Row Type
- R: R/A Single Row Type
- I: Double Insulator Single Row Type

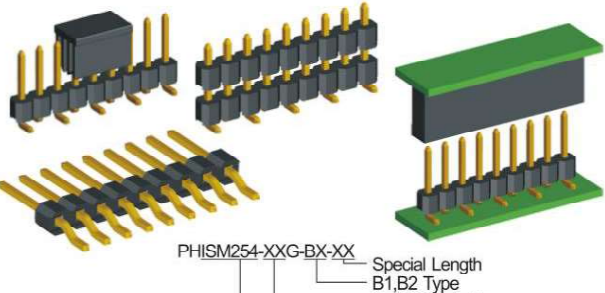

**2.54mm Pin Header Single Row SMD Type.**

PHISM254-XXG-BX-XX


- Special Length B1,B2 Type
- No. Of Contacts (2 To 40 Ways)
- RSM: R/A SMT Single Row Type
- SM: SMT Single Row Type
- ISM: Double Insulator SMT Type

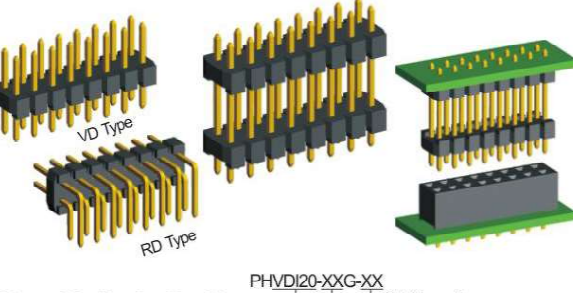

**2.00mm Pin Header Double Rows Straight Dip Type**

PHVDI20-XXG-XX


- Total Length
- Blank: Standard
- No. Of Contacts (4 To 80 Ways)
- VD: Straight Double row Type
- RD: R/A Double Row Type
- DI: Double Insulator & Row Type

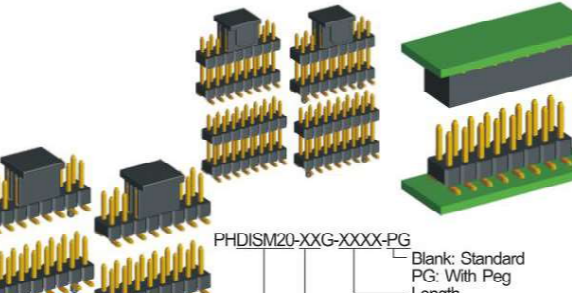

**2.00mm Pin Header Double Rows SMD Type.**

PHDISM20-XXG-XXXX-PG


- Blank: Standard
- PG: With Peg
- Length
- No. Of Contacts (4 To 80 Ways)
- DSM: SMT Double row Type
- DISM: SMT Double Insulator & Row Type

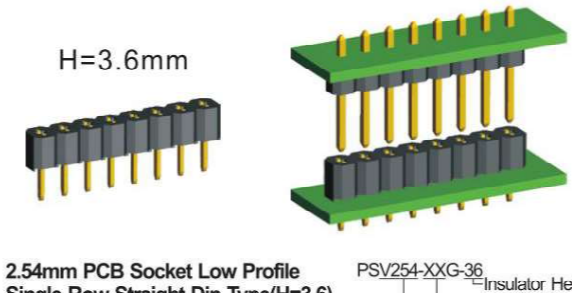

**2.54mm PCB Socket Low Profile Single Row Straight Dip Type(H=3.6).**

PSV254-XXG-36











- Insulator Height 36=3.6mm
- No. Of Contacts (2 To 40 Ways)
- Single Row Straight Type

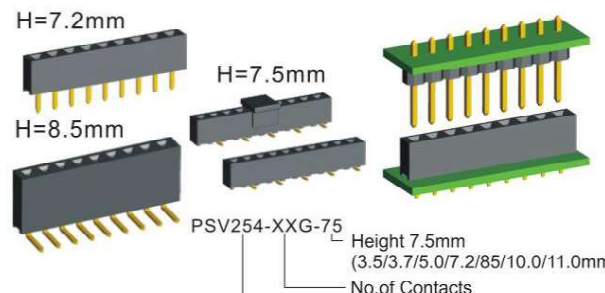

**2.54mm PCB Socket Single Row Straight Dip Serries**

PSV254-XXG-75

- Height 7.5mm (3.5/3.7/5.0/7.2/8.5/10.0/11.0mm)
- No. Of Contacts (2~40pin)
- V: Straight Single row Type
- R: R/A Single Row Type
- SM: SMT Single Row Type

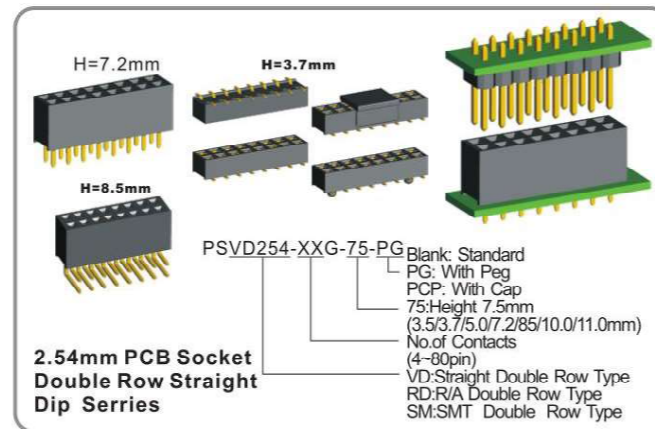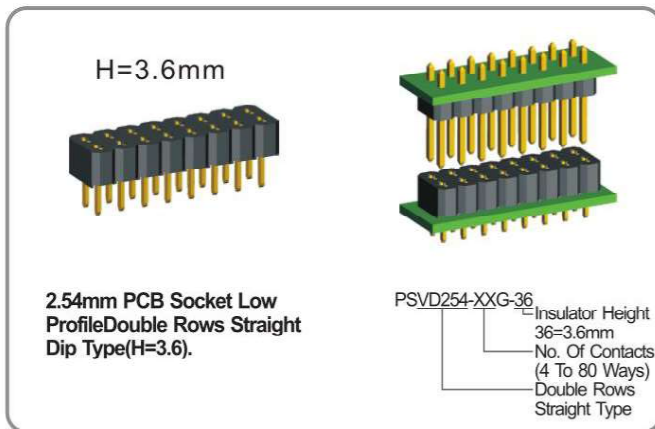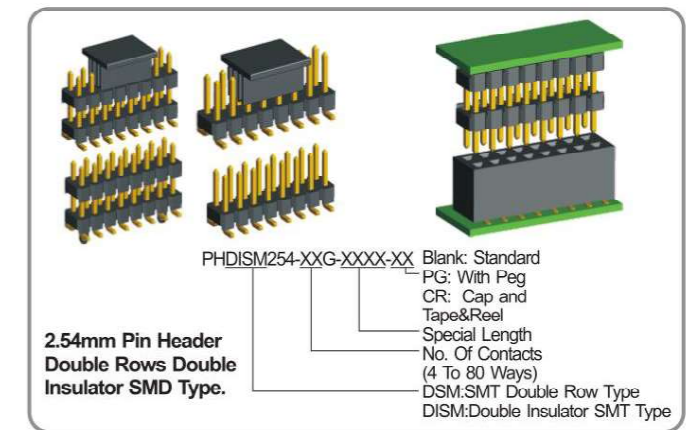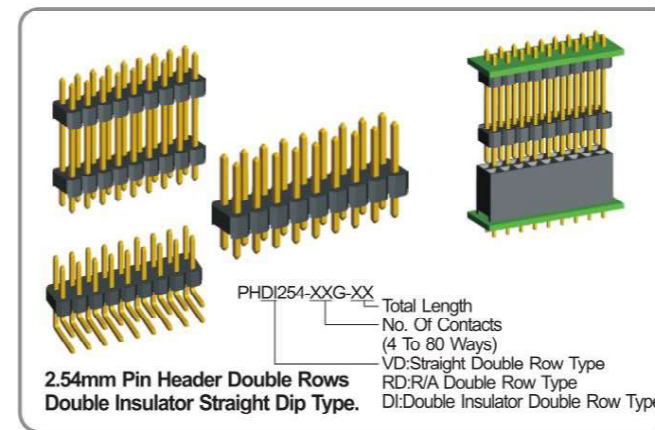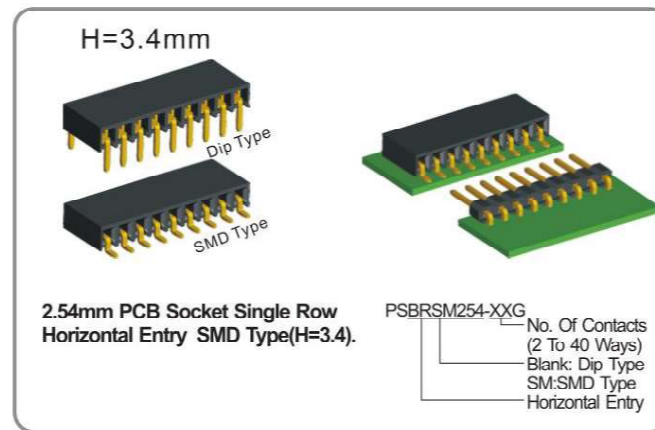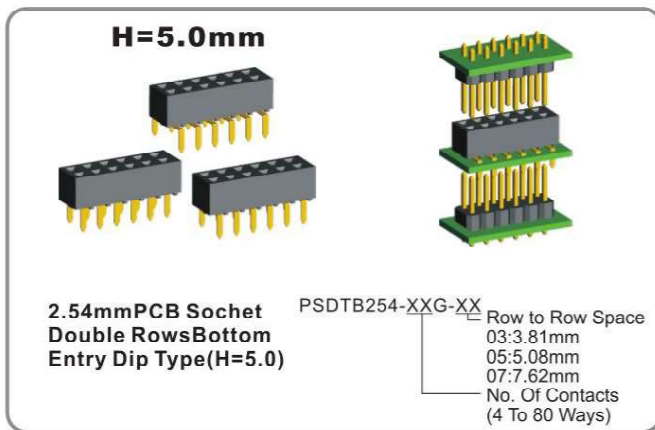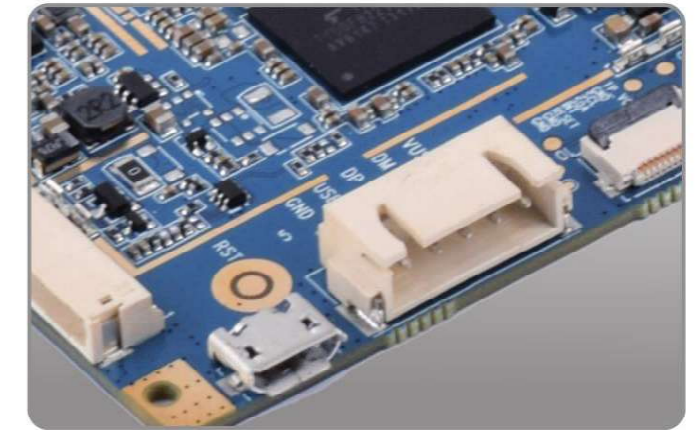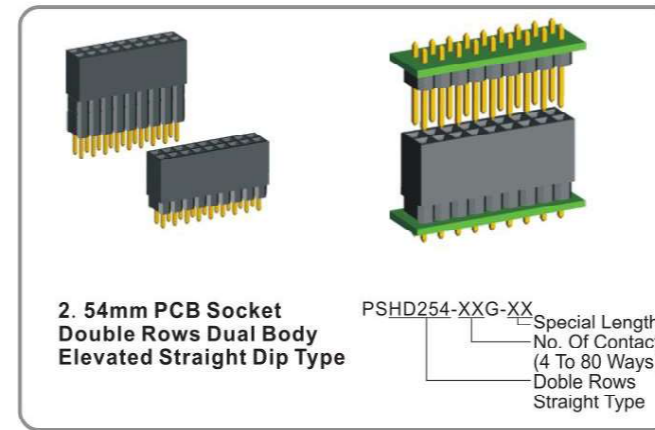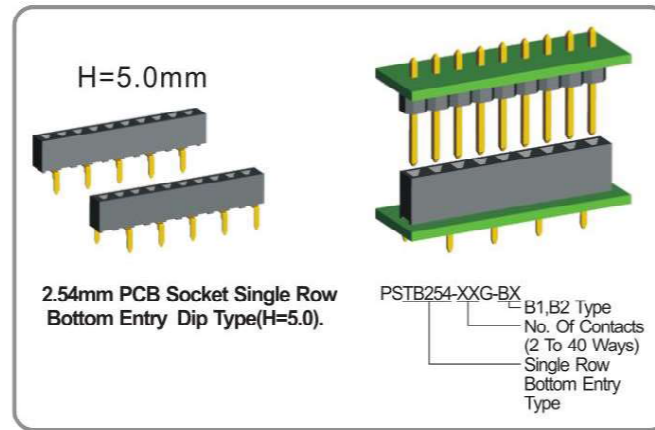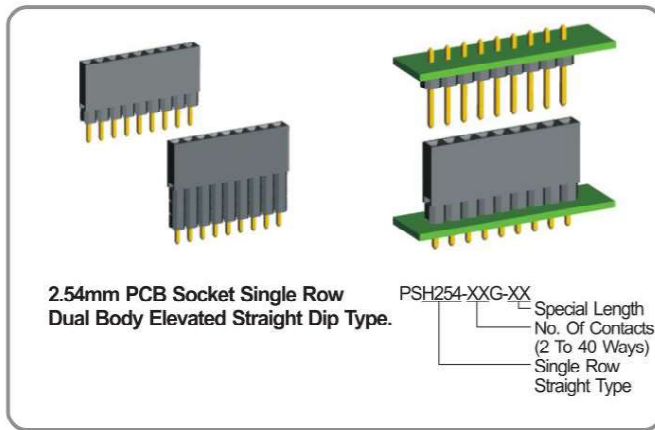

### Wire to Board Wafer Connector&Housing Connector

