

Dimension:


Pos	DimA	DimB	DimC
2	1.25	3.85	5.75
3	2.50	5.10	7.00
4	3.75	6.35	8.25
5	5.00	7.60	9.50
6	6.25	8.85	10.75
7	7.50	10.1	12.00
8	8.75	11.35	13.25
9	10.00	12.60	14.50
10	11.25	13.85	15.75
11	12.50	15.10	17.00
12	13.75	16.35	18.25
13	15.00	17.60	19.50
14	16.25	18.85	20.75
15	17.50	20.10	22.00
20	23.75	26.35	28.25

Specifications:

Current rating:1.0A AC,DC
 Voltage rating:125V AC,DC
 Contact resistance:20m ohm.Max
 Insulation resistance:100M ohm.Min
 Withstanding voltage:250V AC/minute
 Operating temperature range:-40°C~+85°C
 Material:
 Insulator:High Temp. Plastic(Nylon 9T UL94V-0)
 Insulator Color:Beige
 Contact:Phosphor Bronze
 Plated:Tin Plated

How To Order:
 WF4VSM125-XX

No.Of Position
 Straight SMT Type

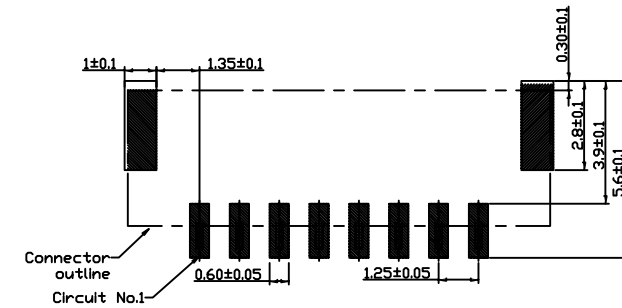

PCB LAYOUT

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	1.25mm Wafer Straight SMT Type	PART NO:	A4
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	WF4VSM125-XX		
A	01-SEP-2015	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					