


Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	0.80	1.90	3.78	12	8.80	9.90	11.78
03	1.60	2.70	4.58	13	9.60	10.70	12.58
04	2.40	3.50	5.38	14	10.40	11.50	13.38
05	3.20	4.30	6.18	15	11.20	12.30	14.18
06	4.00	5.10	6.98	16	12.00	13.10	14.98
07	4.80	5.90	7.78	17	12.80	13.90	15.78
08	5.60	6.70	8.58	18	13.60	14.70	16.58
09	6.40	7.50	9.38	19	14.40	15.50	17.38
10	7.20	8.30	10.18	20	15.20	16.30	18.18
11	8.00	9.10	10.98				


Specifications

Current Rating:0.5A AC/DC
 Voltage Rating:100V AC/DC
 Contact Resistance:40m ohm. Max
 Insulation Resistance:100Mohm min
 Withstanding Voltage:500V(r.m.s) For one Minute
 Operating Temperature Range:-40°C to 105°C
 Materials:
 Insulator:High Temp. Plastic(LCP UL94V-0)
 Color:White
 Contact :Phosphor Bronze
 Plated:Gold Plated



How To Order:
 WFRSM08-XXG

G:Gold Plated
 No. Of Contacts
 RSM:R/A SMT Type

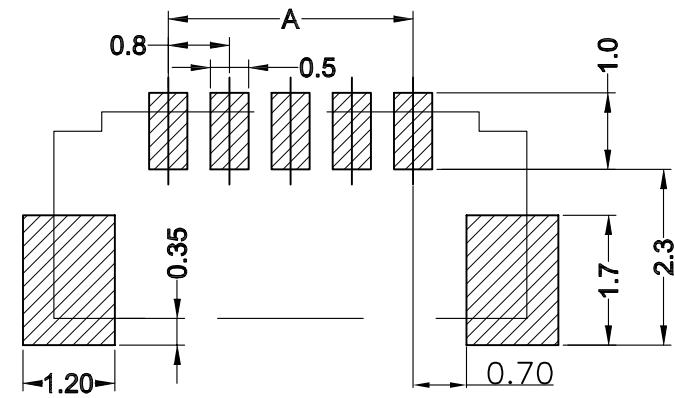

Recommended P.C.B Layout F
 General Tolerance±0.05

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 0.8mm Wafer R/A SMT Type	SIZE A4
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM			
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PART NO:	WFRSM08-XXG	
A	08-Aug-2017	(H0031)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					