

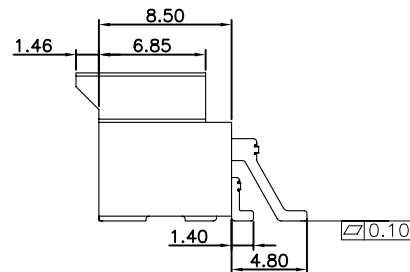
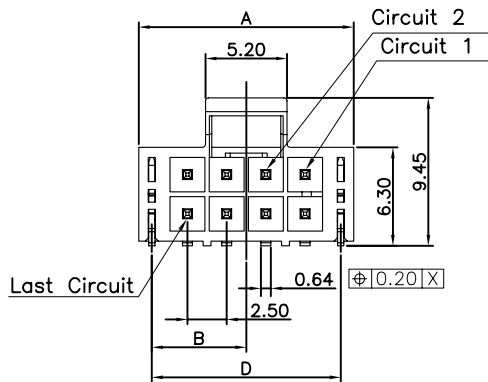


Specifications:
 Current Rating:6.5A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:10mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1500V AC/minute
 Operating Temperature Range:-40°C~+105°C
 Material And Finish:
 Insulator:High Temp. Plastic(LCP UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Tin Plated
 How To Order
 WFRSM25-XXX-LK



LK:With Lock
 G:Gold Plated
 T:Tin Plated
 No. Of Positions
 RSM:R/A SMT Type

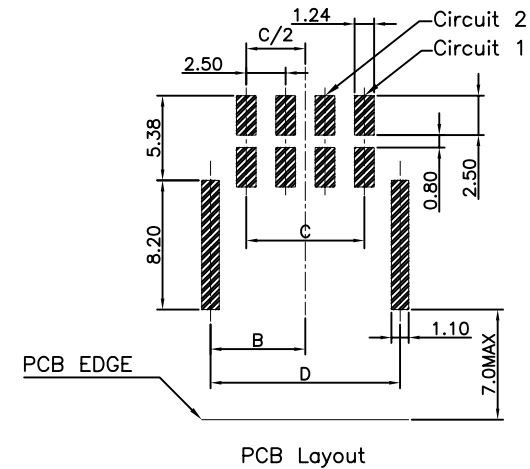

Circuits	Dimension			
	A	B	C	D
4	8.74	3.52	2.50	7.04
6	11.24	4.77	5.00	9.54
8	13.74	6.02	7.50	12.04
10	16.24	7.27	10.00	14.54
12	18.74	8.52	12.50	17.04
14	21.24	9.77	15.00	19.54
16	23.74	11.02	17.50	22.04

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 2.5mm Wafer R/A SMT Double Row Dip With Lock Type	SIZE A4
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: WFRSM25-XXX-LK		
C					SHEET: 1 / 1			
B					PROJECTION:			
A	05-Mar-2018	(PC0001)	Ken					
REV	DATE	FILE	BY					