




A Key




B Key

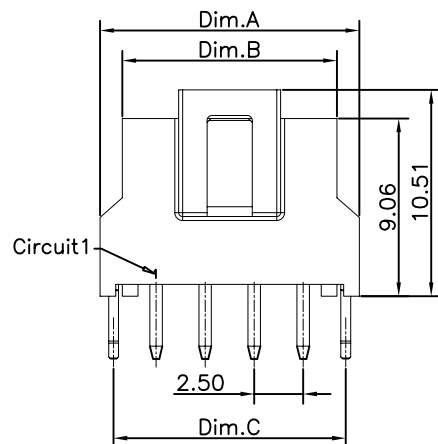

Specifications:
 Current Rating:6.5A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:10mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1500V AC/minute
 Operating Temperature Range:-40°C~+105°C
 Material And Finish:
 Insulator:High Temp. Plastic(LCP UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Tin Plated
 How To Order
 WFFV25-XXX-X-FK-XX

BK:Black
 WH:White
 FK:Fork+Lock
 A:A Key(only Black)
 B:B Key(only White)
 G:Gold Plated
 T:Tin Plated
 No. Of Positions
 V:Straight Dip Type

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
4	8.22	5.94	6.84	12	18.22	15.94	16.84
6	10.72	8.44	9.34	14	20.72	18.44	19.34
8	13.22	10.94	11.84	16	23.22	20.94	21.84
10	15.72	13.44	14.34				

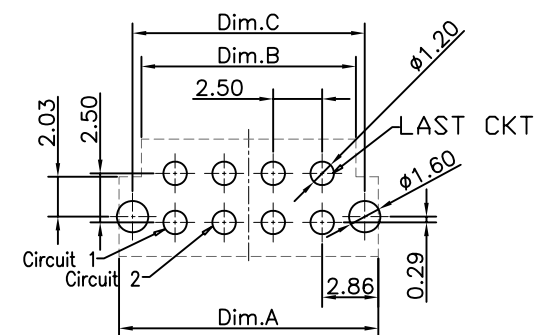

RECOMMENDED PCB(Connector Side View)
 THICKNESS=1.6 To 2.4mm

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 HOYATO Connector supplies		
E								
D								
C				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 2.5mm Wafer Double Row Dip With Lock Type	SIZE A4	
B					SCALE: 1:1			
A	05-Mar-2018	(PC0001)	Ken	APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: WfV25-XXX-X-FK-XX		
REV	DATE	FILE	BY		PROJECTION: 