


Specifications:  
 Current rating:5.0Amps  
 Voltage rating:250V AC,DC  
 Contact resistance:10mohm Max  
 Insulation resistance:1,000Mohm min.  
 Withstanding voltage:1,500V AC;DC  
 Operating temperature range:-25°C ~ +105°C  
 Materials:  
 Insulator:High Temp.Plastic(Nylon 46 UL94V-0)  
 Color:Black  
 Contact:Copper Alloy  
 Plating:Tin Plated  
 How to order  
 WFVA30-XX  
 No.of Positions  
 VA:Straight Single row

Positions	Dimension		Positions	Dimension	
	A	B		A	B
2	9.65	3.00	8	27.65	21.00
3	12.65	6.00	9	30.65	24.00
4	15.65	9.00	10	33.65	27.00
5	18.65	12.00	11	36.65	30.00
6	21.65	15.00	12	39.65	33.00
7	24.65	18.00			

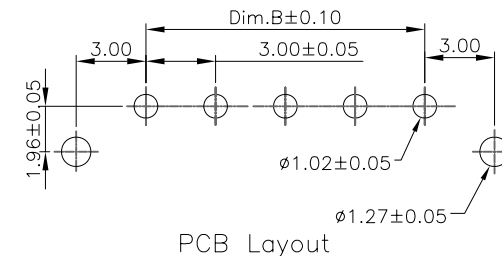

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 3.0mm Wafer Single Row Straight Type	SIZE <b>A4</b>
E				CHECKED: Lily Chou				
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: WFVA30-XX		
C					PROJECTION:			
B								
A	01-SEP-2009	(PC0001)	Ken					
REV	DATE	FILE	BY					


1

2


3

4

5




8P




2P


3P




9P




4P




10P




5P




11P



6P



12P




7P

此為防呆

5561SA-XX (2-12)Pin防呆位置分部示意圖

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	3.0mm Wafer Single Row Straight Type	A4	
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 2	PART NO:	WFVA30-XX	
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					