


Specifications:

Current Rating:1.0A AC/DC
 Voltage Rating:50V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:100M ohm. Min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Range:-25°C ~ +85°C
 Material and Finish
 Insulator:High Temp. Plastic (Nylon 46 UL 94V-0)
 Insulator Color: Natural(White)
 Contact:Brass
 Plated:Tin Plated
 Package:1000pcs/Reel

How To Order

WFVSM10-XX-CR
 Cap+Tape&Reel
 No. of Positions
 S: Straight SMT Type

Poles	Dimension mm (in.)		Poles	Dimension mm (in.)	
	A	B		A	B
2	1.0(0.039)	4.0(0.157)	10	9.0(0.354)	12.0(0.472)
3	2.0(0.079)	5.0(0.197)	11	10.0(0.394)	13.0(0.512)
4	3.0(0.118)	6.0(0.236)	12	11.0(0.433)	14.0(0.551)
5	4.0(0.157)	7.0(0.276)	13	12.0(0.472)	15.0(0.591)
6	5.0(0.197)	8.0(0.315)	14	13.0(0.512)	16.0(0.630)
7	6.0(0.236)	9.0(0.354)	15	14.0(0.551)	17.0(0.669)
8	7.0(0.276)	10.0(0.394)	20	19.0(0.748)	22.0(0.866)
9	8.0(0.315)	11.0(0.433)			

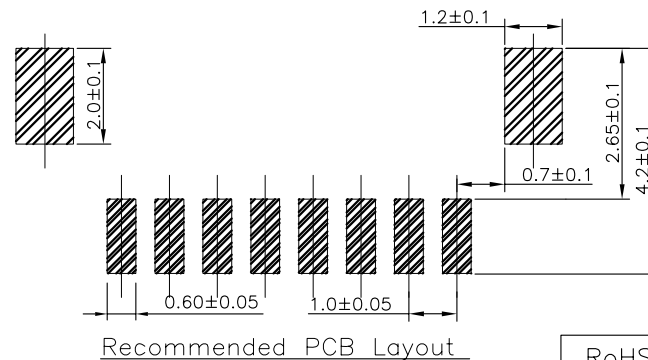

RoHS Compliant

F			
E			
D			
C			
B			
A	01-SEP-2013	(PC0001)	Ken
REV	DATE	FILE	BY

DRAWN: Ken
 CHECKED: Lily Chou
 APPROVAL: Chao Peng

GENERAL TOLERANCE:
 .X=±0.20
 .XX=±0.15
 UNIT: MM
 SCALE: 1:1
 SHEET: 1 / 1
 PROJECTION:

HOYATO 东莞好亚通电子厂
 Connector supplies
 DESCRIPTION: 1.0mm Wafer **Straight** SMT Type
 PART NO: WFVSM10-XX-CR

SIZE
A4