




1

2

3

4

5

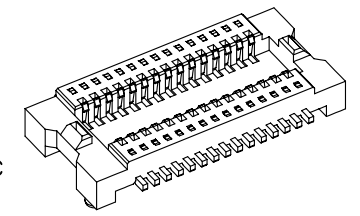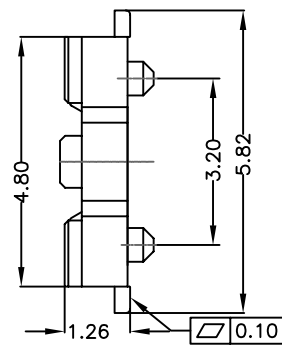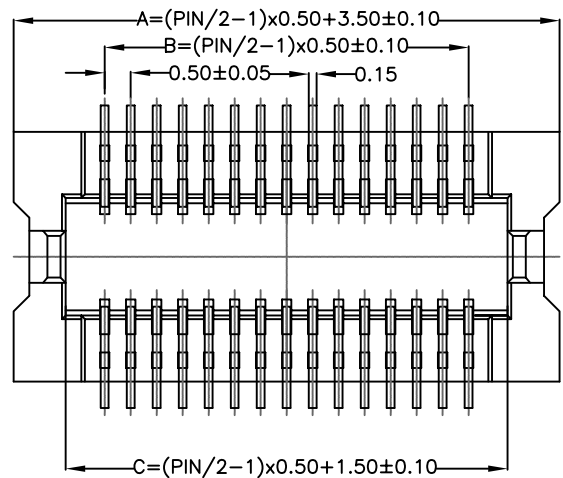

specifications:

- 1. Current Rating : 0.5A AC/DC
- 2. Voltage Rating : 50V AC/DC
- 3. Contact Resistance : 30m ohm. max.
- 4. Insulation Resistance : 100M ohm. min.at 100V DC
- 5. Withstanding Voltage : 100V AC for one minute
- 6. Operating Temperature Range : -20°C to +105°C




Material and Plated: Nylon 46 UL94V-0)

- 1.Housing :High Temp. Plastic (Color :White
- 2.Contact : Phosphor Bronze
- 3.Plated : Gold Plated

Package:1800Pcs/Reel


How To Order

BBS05-XXG-126

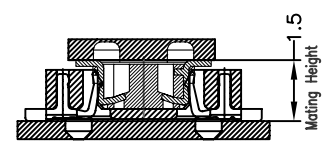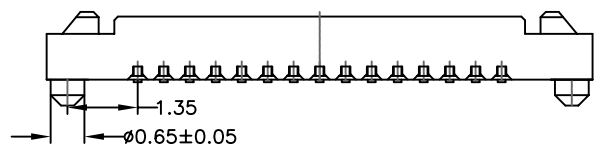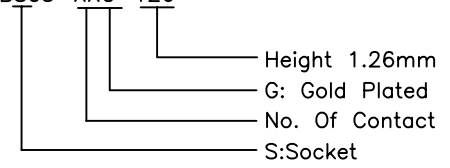

MATED DRAWING (REF) SCALE : 5 : 1

Stacking Height Variations	
	BBP05-XXG-120-PN
BBS05-XXG-126-PN	1.5

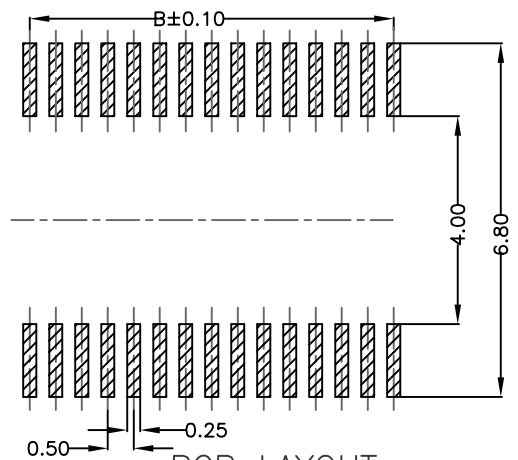

PCB LAYOUT

RoHS Compliant

Dimension

PIN	A	B	C
30P	10.50	7.00	8.50
28P	10.0	6.50	8.00
26P	9.50	6.00	7.50
24P	9.00	5.50	7.00
22P	8.50	5.00	6.50
20P	8.00	4.50	6.00
18P	7.50	4.00	5.50
16P	7.00	3.50	5.00
14P	6.50	3.00	4.50
12P	6.00	2.50	4.00
10P	5.50	2.00	3.50

PIN	A	B	C
120P	33.00	29.50	31.00
100P	28.00	24.50	26.00
80P	23.00	19.50	21.00
70P	20.50	17.00	18.50
60P	18.00	14.50	16.00
50P	15.50	12.00	13.50
40P	13.00	9.50	11.00
36P	12.00	8.50	10.00
34P	11.50	8.00	9.50
32P	11.00	7.50	9.00

F					
E					
D					
C					
B					
A	08-SEP-2013	(PC0001)	Ken	APPROVAL:	
REV	DATE	FILE	BY	Chao Peng	

DRAWN:	Ken
CHECKED:	Lily Chou
APPROVAL:	Chao Peng

GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15
UNIT:	MM
SCALE:	1:1
SHEET:	1 / 1
PROJECTION:	

DESCRIPTION:	0.5mm Board To Board Socket 1.26mm Height SMT Type
PART NO:	BBS05-XXG-126

SIZE	A4
------	-----------