

Specifications:


1. Current Rating : 0.5A AC/DC
2. Voltage Rating : 50V AC/DC
3. Contact Resistance : 30m ohm. max.
4. Insulation Resistance : 100M ohm. min.at 100V DC
5. Withstanding Voltage : 100V AC for one minute
6. Operating Temperature Range : -20°C to +105°C

- Material and Plated
1. Housing :High Temp. Plastic (LCP UL94V-0)
Color :White
 - 2.Contact : Phosphor Bronze
 - 3.Plated : Gold Plated

How To Order

BBS0635-60G-232-PN

- Without Post
- Height 2.32mm
- G: Gold Plated
- No. Of Contact
- S:Socket

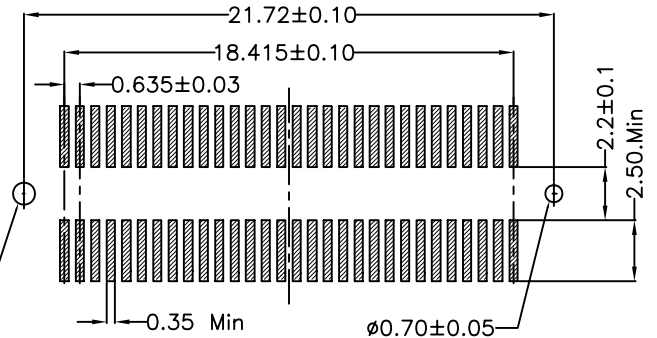

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 0.635mm Board To Board Socket 2.32mm Height SMT Type	SIZE A4
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	BBS0635-60G-232-PN		
A	08-SEP-2013	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					