



No. of contacts	Dimensions				No. of contacts	Dimensions			
	A	B	C	D		A	B	C	D
2*4	5.0	2.4	3.65	4.2	2*18	16.2	13.6	14.85	15.4
2*5	5.8	3.2	4.45	5.0	2*19	17.0	14.4	15.65	16.2
2*6	6.6	4.0	5.25	5.8	2*20	17.8	15.2	16.45	17.0
2*7	7.4	4.8	6.05	6.6	2*21	18.6	16.0	17.25	17.8
2*8	8.2	5.6	6.85	7.4	2*22	19.4	16.8	18.05	18.6
2*9	9.0	6.4	7.65	8.2	2*23	20.2	17.6	18.85	19.4
2*10	9.8	7.2	8.45	9.0	2*24	21.0	18.4	19.65	20.2
2*11	10.6	8.0	9.25	9.8	2*25	21.8	19.2	20.45	21.0
2*12	11.4	8.8	10.05	10.6	2*26	22.6	20.0	21.25	21.8
2*13	12.2	9.6	10.85	11.4	2*27	23.4	20.8	22.05	22.6
2*14	13.0	10.4	11.65	12.2	2*28	24.2	21.6	22.85	23.4
2*15	13.8	11.2	12.45	13.0	2*29	25.0	22.4	23.65	24.2
2*16	14.6	12.0	13.25	13.8	2*30	25.8	23.2	24.45	25.0
2*17	15.4	12.8	14.00	14.6					

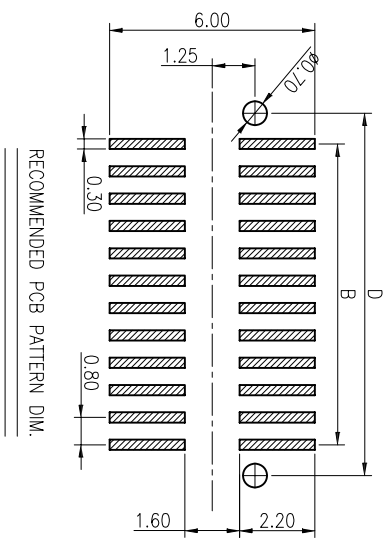

- Specifications:**
1. Current Rating : 0.5A AC/DC
  2. Voltage Rating : 50V AC/DC
  3. Contact Resistance : 30m ohm. max.
  4. Insulation Resistance : 100M ohm. min. at 100V DC
  5. Withstanding Voltage : 100V AC for one minute
  6. Operating Temperature Range : -20°C to +105°C
- Meril and Plated
1. Housing : High Temp. Plastic (LCP UL94V-0)

- Color : Black
2. Contact : Phosphor Bronze
3. Plated : Gold Plated
- Package: 1000Pcs/Reel
- How To Order
- BBS08D-XXG-XXX-BK

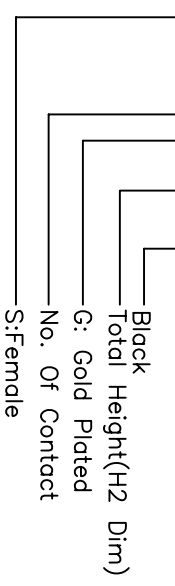

REV	DATE	FILE	BY	DRAWN:	GENERAL TOLERANCE:	DESCRIPTION:	SIZE
A	08-SEP-2016	(H0101)	Ken	Ken	.X = ±0.20 .XX = ±0.15	0.8mm Board To Board Female SMT Type	A4
B							
C							
D							
E							
F							

ROHS Compliant

