



Pos	A	B	C
9	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.83	63.50	69.32

Specifications:
 Current Rating:3.0A AC,DC
 Voltage Rating:250V AC,DC
 Temperature Range:-40°C ~ +85°C
 Contact Resistance:30mohm max.
 Insulation Resistance:5,000Mohm min.
 Withstanding Voltage:1,000V AC/Minute



Materials:
 Insulator:High Temp. Plastic (UL 94V-0)
 Contact:Copper Alloy
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:Metal Iron with Nickel plated

How To Order
 DBSH1-XXX-XXX
 BH:Board Lock/Hex Screw
 RL:Rivet W/Board Lock
 RLH:Rivet W/Board Lock/Hex Screw
 RLB:Rivet W/Board Lock/
 Attached Hex Screw
 G:Full Gold plated
 SG:Selective Gold Plated
 No.Of Positions
 S:Female
 8.08mm Footprint

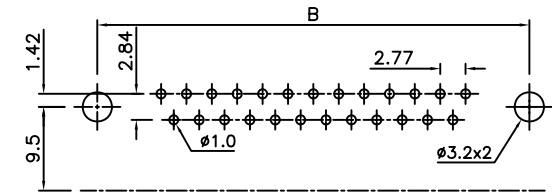

P.C.B. Layout

RoHS Compliant

E				DRAWN: Jack Zhou	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: D-SUB Female 8.08mm Footprint Right Angle Type	SIZE A4
D				CHECKED: Ken Wang	UNIT: MM SCALE:2:1			
C				APPROVAL: Make Hu	SHEET: 1 / 1	PART NO: DBSH1-XXX-XXX		
B					PROJECTION:			
A	04-Sep-2013	(H0050)	Jack Zhou					
REV	DATE	FILE	BY					