



Specifications:  
 Current Rating:1.0A AC/DC  
 Voltage Rating:12V AC/DC  
 Contact Resistance:20m ohm. Max.  
 Insulation Resistance:100M ohm. Min.  
 Withstanding Voltage:250V AC For One Minute  
 Operating Temperature Range:-40°C To +105°C



Materials:  
 Insulator:High Temp. Plastic(Nylon9T UL94V-0)  
 Insulator Color:Black  
 Contact:Copper Alloy  
 Plating:Tin Plated  
 How To Order  
 DCSRSM20-04-TR

TR:Tape & Reel  
 No.of Positions  
 SSM:Socket R/A SMT Type

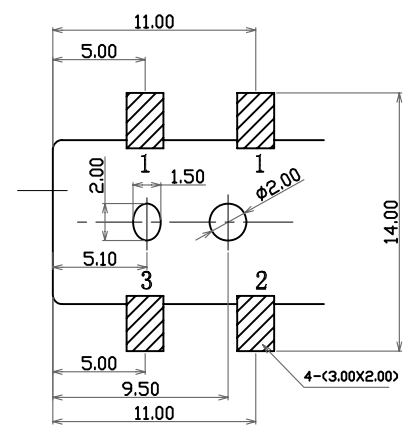

PCB LAYOUT TOP VIEW  
 NOTE:PCB LAYOUT TOLARENCE ±0.05mm

No.	PART NAME	QTY	MATERIAL (THICK, COLOR)	REMARK
⑥	COVER	1	PA9T (Black)	
⑤	HOUSING	1	PA9T (Black)	
④	PIN	1	H65	CuSn-Plated
③	TERMINAL	1	BRASS t=0.4	Sn-Plated
②	TERMINAL	1	PHOSPHOR BRONZE t=0.3	Sn-Plated
①	TERMINAL	1	BRASS t=0.4	Sn-Plated

RoHS Compliant

E				DRAWN: Ken Wang	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: OD 2.0mm DC Power JACK Socket SMT Type	SIZE <b>A4</b>
D				CHECKED: Lily Chou	UNIT: MM			
C				APPROVAL: Chao Peng	SCALE:2:1	PART NO: DCSRSM20-04-TR		
B					SHEET: 1 / 1			
A	14-Jul-2015	(H0109)	Ken Wang		PROJECTION:			
REV	DATE	FILE	BY					