





1

2

3

4

5

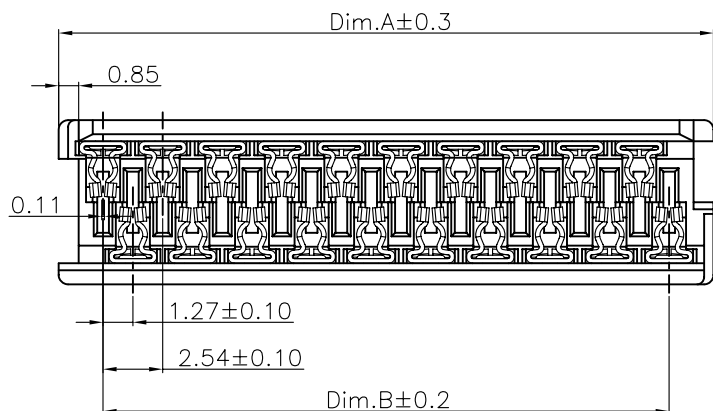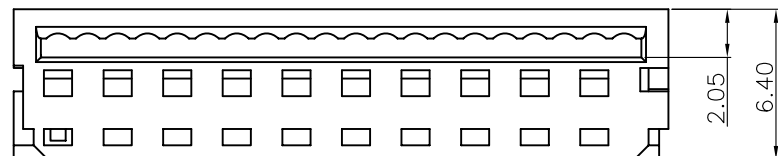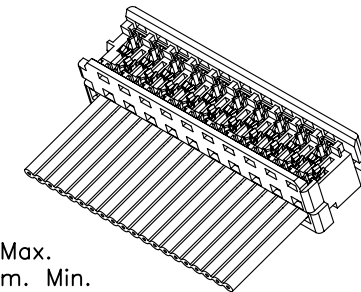

#### Specifications:

Current Rating:1.2A

Voltage Rating:32V

Contact Resistance:10m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:-40°C To +105°C

APPLICABLE WIRE: AWG #26 and #28

#### Materials:

Insulator:High Temp. Plastic(PBT UL94V-0)

Insulator Color:White

Contact:Phosphor Bronze

Plating:Tin Plated

How To Order

H127-XXX

T: Tin Plated



G: Gold Plated

No. Of Positions

#### Dimension:

Pos.	Dimension		Pos.	Dimension	
	A	B		A	B
04	7.59	3.81	16	22.83	19.05
06	10.13	6.35	18	25.37	21.59
08	12.67	8.89	20	27.91	24.13
10	15.21	11.43	22	30.45	26.67
12	17.75	13.97	24	32.99	29.21
14	20.29	16.51	26	35.53	31.75

RoHS Compliant

E				DRAWN: WGL	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: 1.27mm Flat IDC Connector	SIZE <b>A4</b>
D				CHECKED: Jeremy Liu	UNIT: MM SCALE:2:1			
C				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: H127-XXX		
B					PROJECTION: 			
A	14-Jul-2008	(PC0001)	WGL					
REV	DATE	FILE	BY					