




HT254T(PC0006)



SECTION:A-A





SECTION:B-B




Specifications:
 Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:15m ohm. max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding voltage:600V AC For One Minute
 Operating Temperature Range:-25°C to +105°C
 Material and Finish
 Insulator:Nylon 66 UL94V-0
 Contact:Copper Alloy
 Plating:Gold Plated
 How To Order
 H254-XX

No. of Positions

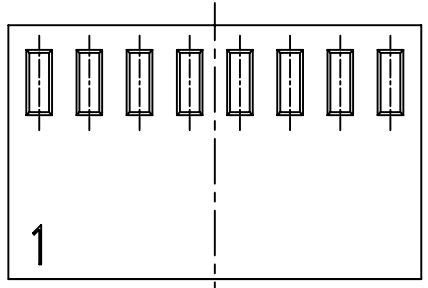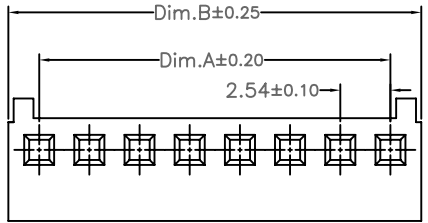

H254-XX

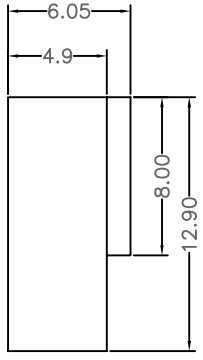

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
01		3.10	11	25.40	28.54
02	2.54	5.68	12	27.94	31.08
03	5.08	8.22	13	30.48	33.62
04	7.62	10.76	14	33.02	36.16
05	10.16	13.30	15	35.56	38.70
06	12.70	15.84	16	38.10	41.24
07	15.24	18.38	17	40.64	43.78
08	17.78	20.92	18	43.18	46.32
09	20.32	23.46	19	45.72	48.86
10	22.86	26.00	20	48.26	51.40

RoHS Compliant

F			
E			
D			
C			
B			
A	01-SEP-2009	(H0050)	Ken
REV	DATE	FILE	BY

DRAWN: Ken
 CHECKED: Lily Chou
 APPROVAL: Chao Peng

GENERAL TOLERANCE:
 .X=±0.20
 .XX=±0.15
 UNIT: MM
 SCALE: 1:1
 SHEET: 1 / 1
 PROJECTION:



DESCRIPTION:
 2.54mm Socekt Housing & Terminal
 PART NO:
 H254-XX & HT254T

SIZE
A4