



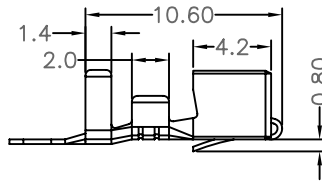


Section:A-A



Section:B-B






Sections:C-C


Specifications:

Current Rating:7.0 AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm.max.
 Insulation Resistance:1,000M ohm.min.
 Withstanding Voltage:1,500V AC/minute
 Operating Temperature Range:-40°C to +105°C
 Application Wires:AWG #22 to #18
 Material and Finish
 Insulator:Nylon 66 (UL94V-0)
 Insulator Color:White
 Contact:Brass
 Finish:Tin Plated
 How To Order
 H396-XX

└── No.of Positions
 └── Housing

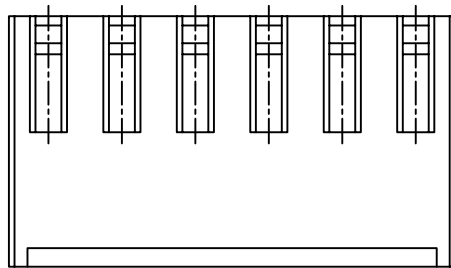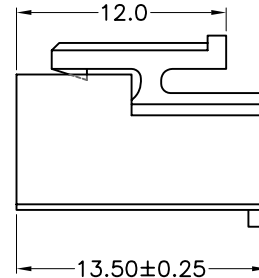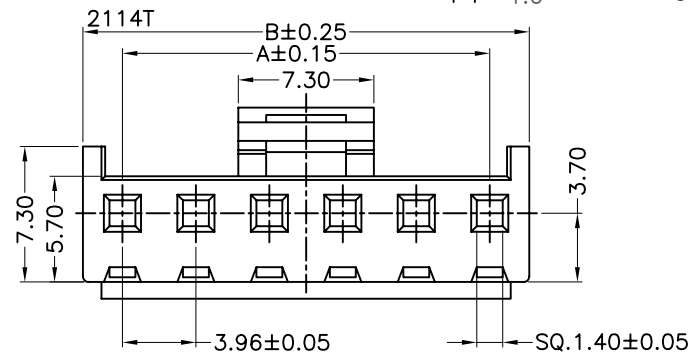

3~15P



2P

Dimension Information:

Circuits	DIM:(mm)		Circuits	DIM:(mm)	
	A	B		A	B
2	3.96	8.42	9	31.68	36.14
3	7.92	12.38	10	35.64	40.10
4	11.88	16.34	11	39.60	44.06
5	15.84	20.30	12	43.56	48.02
6	19.80	24.26	13	47.52	51.98
7	23.76	28.22	14	51.48	55.94
8	27.72	32.18	15	55.44	59.90

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 3.96mm Socket Housing & Terminal	SIZE A4
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: H396-XX & HT396T		
C					APPROVAL: Chao Peng			SHEET: 1 / 1
B					PROJECTION:			
A	20-Jun-2018	(PC0069)	Ken					
REV	DATE	FILE	BY					