
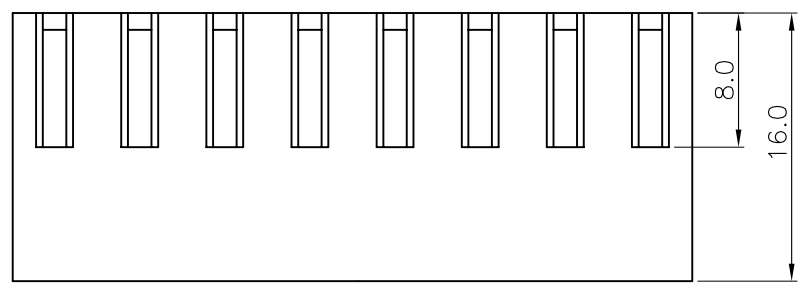
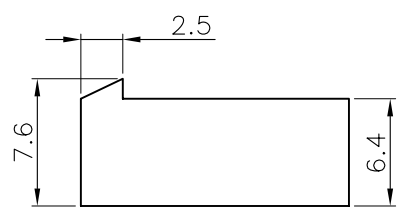
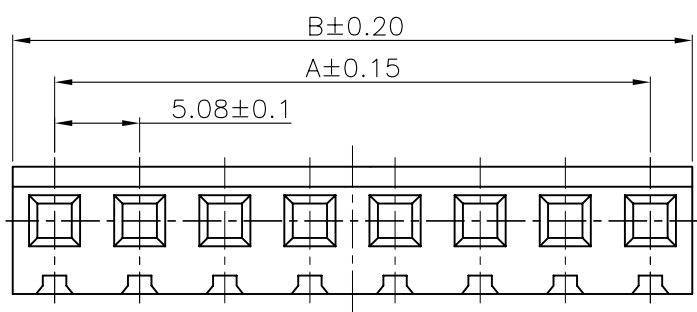



P/N:HT508T



Specifications:
 Current Rating:7.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1000M ohm. min.
 Withstanding Voltage:1500V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Materials And Finish
 Insulator:Nylon66 UL94V-2
 Contact:Copper Alloy
 Plating:Tin Plated
 How To Order:
 H508-XX
 No. of Positions
 H:Housing

Dimension Information:

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
2	5.08	10.08	7	30.48	35.48
3	10.16	15.16	8	35.56	40.56
4	15.24	20.24	9	40.64	45.64
5	20.32	25.32	10	45.72	50.72
6	25.40	30.40			

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 5.08mm Female Wire To Housing & Terminal	SIZE A4
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: H508-XX & HT508T		
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 2			
A	01-SEP-2016	(PC0001)	Ken		PROJECTION:			
REV	DATE	FILE	BY					