
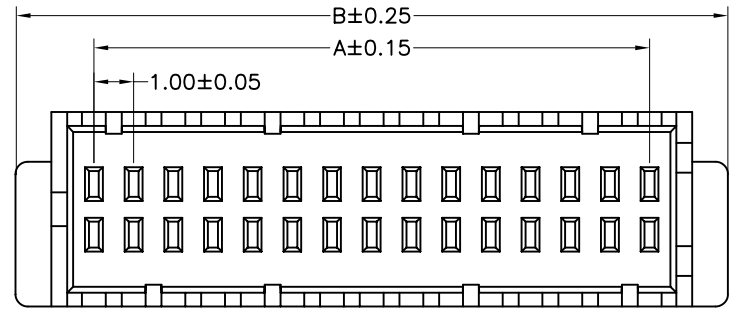


Specifications:
 Current Rating:1.0A AC/DC
 Voltage Rating:50V AC/DC
 Contact Resistance:20m ohm. max.
 Insulation Resistance:100M ohm. min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Range:-25°C ~ +85°C
 Application Wire:AWG #32 To #28
 Material and Finish
 Insulator:Nylon 66 UL94V-0
 Insulator Color:White
 Contact:Phosphor Bronze
 Plating:Tin plated
 How To Order
 HB10-XX
 └── No. of positions

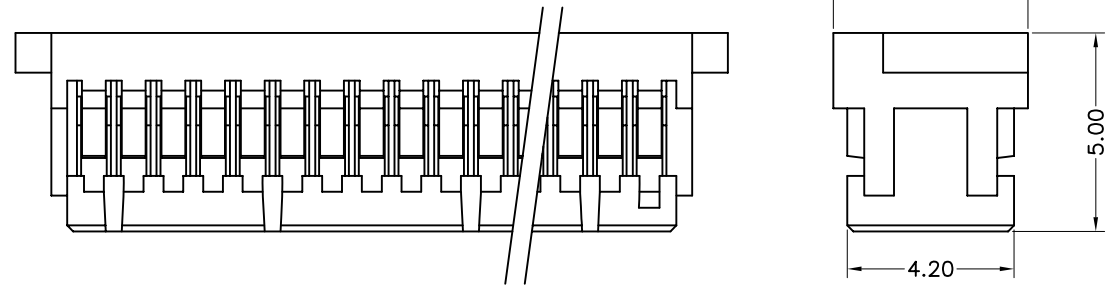

Dimension:

Part No.	Dim.A	Dim.B
12	5.00	8.00
16	7.00	11.00
20	9.00	13.00
30	14.00	18.00
40	19.00	23.00
50	24.00	28.00

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 1.0mm Double Row Socket Housing & Terminal	SIZE A4
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: HB10-XX & H10T		
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1			
A	01-SEP-2017	(H0031)	Ken		PROJECTION:			
REV	DATE	FILE	BY					