




HST125T





Section:A-A




Section:B-B



Section:C-C

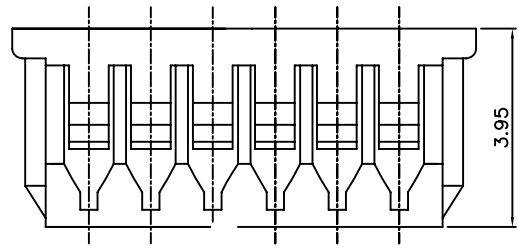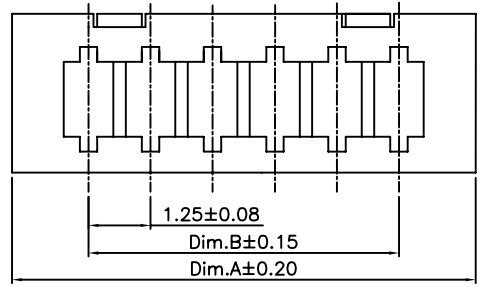


HS125-XX



Specification:

Current Rating: 1.0A AC,DC
 Voltage rating: 125V AC,DC
 Contact Resistance: 20m Max
 Insulation Resistance: 100M Min
 Withstanding Voltage:250V AC/Minute
 Temperature Range: -40°C to +85°C
 Applicable Wire: AWG 28# TO 32#
 Material:
 Insulator: High Temp Plastic (Nylon 66 UL94V-0)
 Insulator Color:White
 Contacts:Phosphor Bronze
 Plating:Tin Plated
 How To Order
 HS125-XX



No.Of Position
 Socket Housing

Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B
2	4.25	1.25	9	13.00	10.00
3	5.50	2.50	10	14.25	11.25
4	6.75	3.75	11	15.50	12.50
5	8.00	5.00	12	16.75	13.75
6	9.25	6.25	13	18.00	15.00
7	10.50	7.50	14	19.25	16.25
8	11.75	8.75	15	20.50	17.50

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 1.25mm Socket Housing & Terminal	SIZE A4
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM			
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PART NO:	HS125-XX & HST125T	
A	01-SEP-2012	(H0031)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					