




Section:A-A




Section:B-B




Section:C-C



Section:D-D

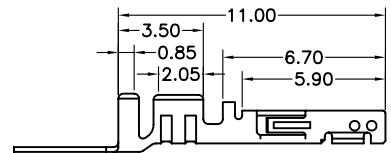



HST30T







Specifications:

Current Rating:5.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1.500V AC/Minute
 Operating Temperature Range:-40°C~+105°C
 Material and Finish
 Insulator:Nylon66 UL94V-0
 Insulator Color: Black
 Contact:Phosphor Bronze
 Plating:Tin Plated
 Mating With:HST30T terminal
 How To Order
 HSA30-XX

— No. Of Positions

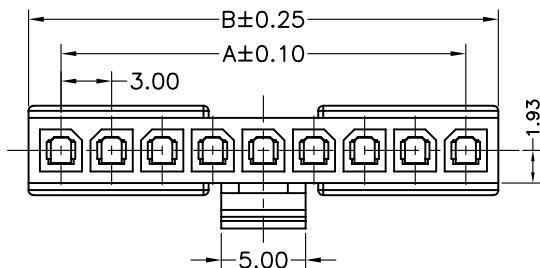

(2PIN Circuit Housing)

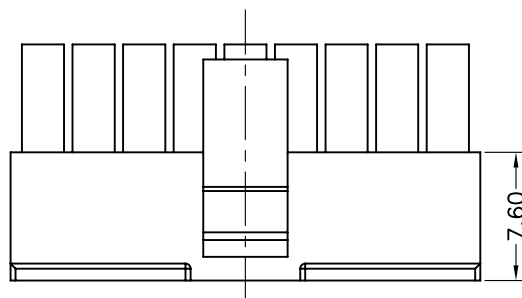

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	3.00	See detail	8	21.00	24.85
3	6.00	9.85	9	24.00	27.85
4	9.00	12.85	10	27.00	30.85
5	12.00	15.85	11	30.00	33.85
6	15.00	18.85	12	33.00	36.85
7	18.00	21.85			

Halogen-Free
 RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	3.0mm Power Socket Single Row Housing & Terminal	PART NO:	A4
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 2	HSA30-XX & HST30T		
A	01-SEP-2012	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					