
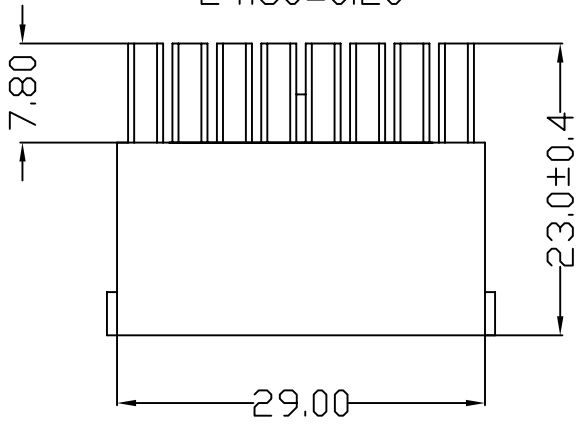
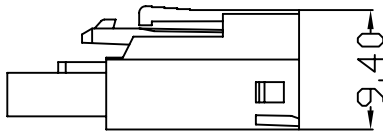
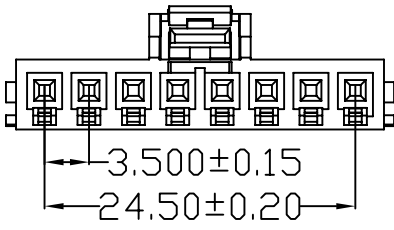


Specifications:
 Current Rating:14.0A AC/DC
 Voltage Rating:400V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1.800V AC/Minute
 Operating Temperature Range:-40°C~+105°C
 Material and Finish
 Insulator:Nylon66 UL94V-0
 Contact:Phosphor Bronze
 Plating:Tin Plated
 Reommended Insulator
 16AWG Wire OD 2.0mm Max
 18AWG Wire OD 1.7mm Max
 20Awg Wire OD 1.5mm Max
 22Awg Wire OD 1.2mm Max
 How To OrderNo. Of Positions
 HSA35-08-B1



RoHS Compliant

F			
E			
D			
C			
B			
A	04-Nov-2019	(PC0001)	Ken
REV	DATE	FILE	BY

DRAWN:
Ken
 CHECKED:
Lily Chou
 APPROVAL:
Chao Peng

GENERAL TOLERANCE:
 .X=±0.20
 .XX=±0.15
 UNIT: MM
 SCALE: 1:1
 SHEET: 1 / 2
 PROJECTION:

HOYATO
Connector supplies

DESCRIPTION:
3.5mm Power Socket Housing

PART NO:
HSA35-08-B1

SIZE
A4