



1

2


3

4


5

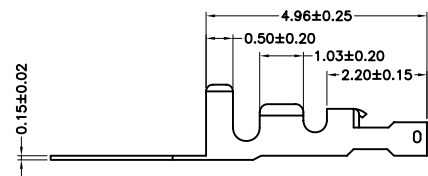


Section: C-C




Section: D-D

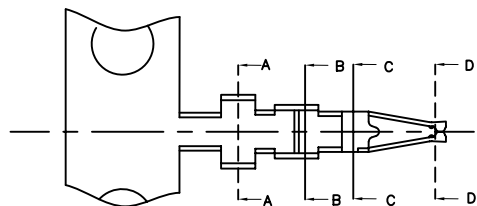



HSBT125T




Section: A-A



Section: B-B

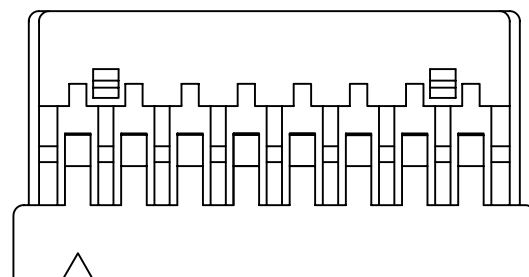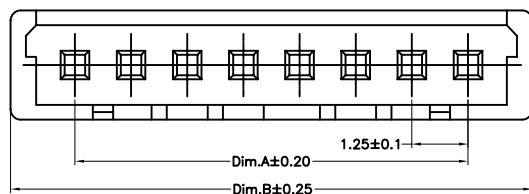

HSB125-XX



Specification:

Current Rating: 1.0A AC,DC

Voltage rating: 125V AC,DC

Contact Resistance: 20m Max

Insulation Resistance: 100M Min

Withstanding Voltage: 250V AC/Minute

Temperature Range: -40°C to +85°C

Applicable Wire: AWG 28# TO 32#

Material:

Insulator: High Temp Plastic (Nylon 66 UL94V-0)

Insulator Color: White

Contacts: Phosphor Bronze

Plating: Tin Plated

How To Order

HSB125-XX

No.Of Position
Socket Housing

Dimension:(2~30P)

Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B
2	1.25	4.35	11	12.50	15.60
3	2.50	5.60	12	13.75	16.85
4	3.75	6.85	13	15.00	18.10
5	5.00	8.10	14	16.25	19.35
6	6.25	9.35	15	17.50	20.60
7	7.50	10.60	20	23.75	26.85
8	8.75	11.85	25	30.00	33.10
9	10.00	13.10	30	36.25	39.35
10	11.25	14.35			

RoHS Compliant

F			
E			
D			
C			
B			
A	01-SEP-2012	(H0031)	Ken
REV	DATE	FILE	BY

DRAWN:	Ken
CHECKED:	Lily Chou
APPROVAL:	Chao Peng

GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15
UNIT:	MM
SCALE:	1:1
SHEET:	1 / 1
PROJECTION:	

HOYATO
Connector supplies

东莞好亚通电子厂

DESCRIPTION:

1.25mm Socket Housing & Terminal

PART NO:

HSB125-XX & HSBT125T

SIZE

A4