



HST30T




Section:A-A




Section:B-B



Section:C-C





Section:D-D




Specifications:

Current Rating:5.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1.500V AC/Minute
 Operating Temperature Range:-40°C~+105°C
 Material and Finish
 Insulator:Nylon66 UL94V-0
 Insulator Color: Black
 Contact:Phosphor Bronze
 Plating:Tin Plated
 Mating With:HT30T terminal
 How To Order
 HSD30-XX



└── No. Of Positions

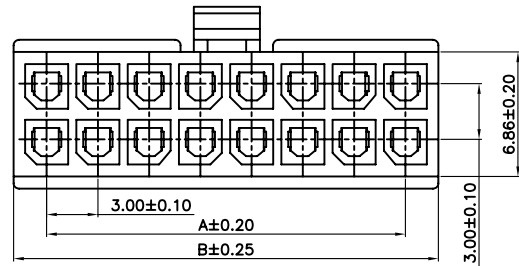

4Pin



2Pin

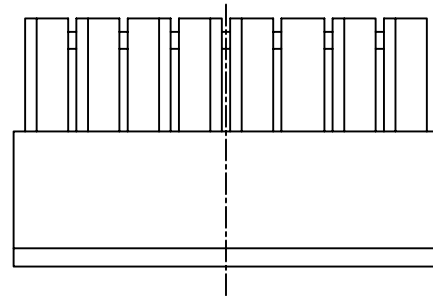

PART NO.	Dimension	
	A	B
HSD30-02	—	3.85
HSD30-04	3.00	6.85
HSD30-06	6.00	9.85
HSD30-08	9.00	12.85
HSD30-10	12.00	15.85
HSD30-12	15.00	18.85
HSD30-14	18.00	21.85
HSD30-16	21.00	24.85
HSD30-18	24.00	27.85
HSD30-20	27.00	30.85
HSD30-22	30.00	33.85
HSD30-24	33.00	36.85

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 3.0mm Power Socket Housing & Terminal	SIZE A4
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: HSD30-XX & HST30T		
C					PROJECTION:			
B								
A	01-SEP-2012	(PC0001)	Ken					
REV	DATE	FILE	BY					