


Specifications:

Current Rating:1A AC/DC
 Voltage Rating:60V AC/DC
 Contact Resistance:5m ohm. Max.
 Insulation Resistance:100M ohm. Min.
 Withstanding Voltage:500V AC/Minute
 Waterproof rate:IP67
 Operating Temperature Range:-25°C ~ +90°C
 Material and Finish
 Insulator:TPU/PA+GF
 Contact:Brass Gold Plated
 Nut/Screw:Brass Nickel Plated
 Seal/O-ring:Epoxxy resin/FKM

How to Order

M8-XXX-XAXX-PM

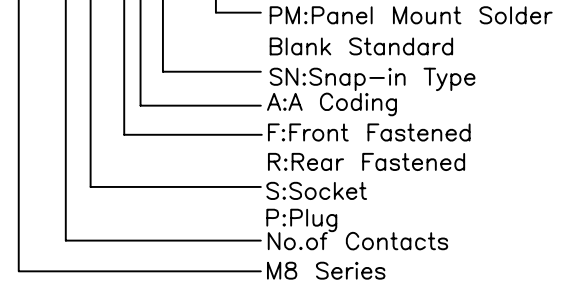

Contact Configuration:

Contacts		Contacts Termination	Wire gauge /size		Contacts			Contacts Termination	Wire gauge /size		
Pin	Socket		AWG	mm2	Pin	Socket	Plug		AWG	mm2	
3Pin (A Coding)			Solder	24	0.25	6Pin (A Coding)			Solder	26	0.14
4Pin (A Coding)			Solder	24	0.25	8Pin (A Coding)			Solder	26	0.14
5Pin (A Coding)			Solder	24	0.25						

RoHS Compliant

F					DRAWN: ANDREW	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15 .XXX=±0.10		DESCRIPTION: M5 Panec Mount/Solder/Front(Rear) Fastened Connector	SIZE
E									
D					CHECKED: BILLHE	UNIT: MM	PART NO:	A4	
C						SCALE: 1:1			
B					APPROVAL: NORMAN	SHEET: 1/1	M8-XXX-XAXX-PM		
A	28-APR-2019	(PC0001)	ANDREW			PROJECTION:			
REV	DATE	FILE	BY						