






1 2 3 4 5


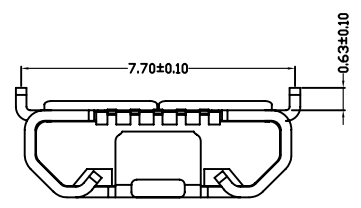


Specifications:
 Current Rating:1.0A AC,DC
 Voltage Rating:30V AC,DC
 Contact Resistance:20M Ohm Max
 Insulation Resistance:1,000M Ohm Min
 Withstanding Voltage:750V AC/Minute
 Operating Temperature Range:-40°C to +105°C

Materials:
 Insulator:High Temp.Plastic (LCP UL94V-0)
 Contact:Brass
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.

Shell:Brass,Tin Plate

How To Order
 MUBPRSM1-05

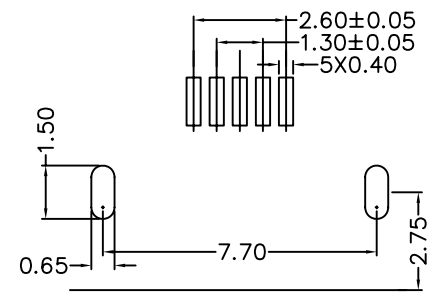

PCB LAYOUT

RoHS Compliant

				DRAWN: Jack Zhou	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	HOYATO 东莞好亚通电子厂 Connector supplies	DESCRIPTION: Mirco USB Plug 5P SMT ReverseType	SIZE A4
E				CHECKED: Ken Wang	UNIT: MM SCALE:2:1			
D				APPROVAL: Make Hu	SHEET: 1 / 1	PART NO: MUBPRSM1-05		
C					PROJECTION:			
B								
A	20-Jan-2014	(H0028)	Jack Zhou					
REV	DATE	FILE	BY					

A

B

C

D