

Specifications:

Current Rating:1.0 Amps

Voltage Rating:50V AC/DC

Contact Resistance:20mohm max.

Insulation Resistance:1,000M ohm min.

Withstanding Voltage:500V For One Minute

Operating Temperature:-25°C ~ +105°C

Material

Insulator:High Temp.Plastic(Nylon 6T UL94V-0)

Standard Color:Black





Contact:Copper Alloy

Plating:Gold Plated

How To Order

PHRDSM127-XXG-3853CR

Cap+Tape&Reel
 Length
 G:Gold Plated
 No. of Positions
 SMD Type
 R/A Double Rows

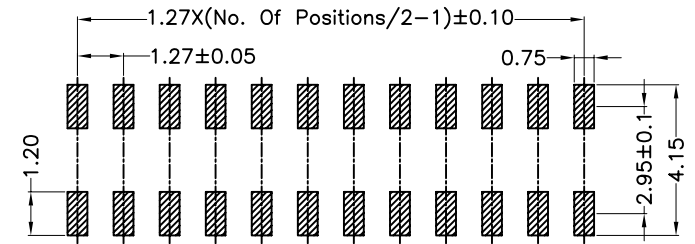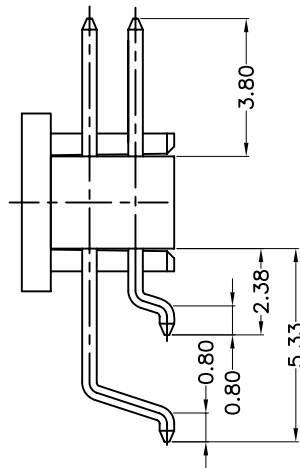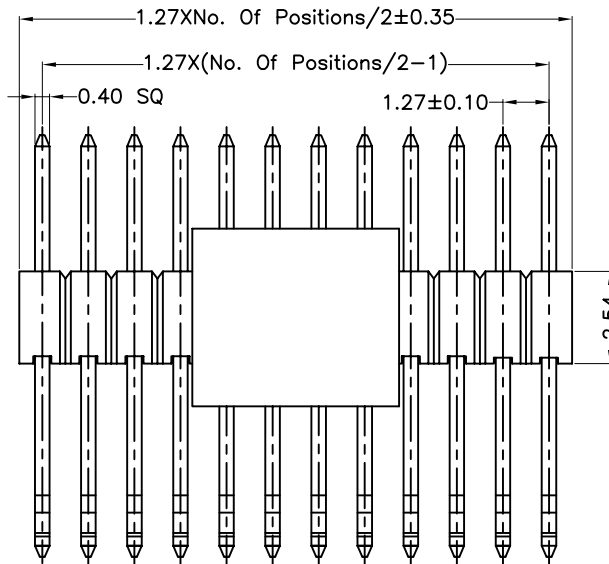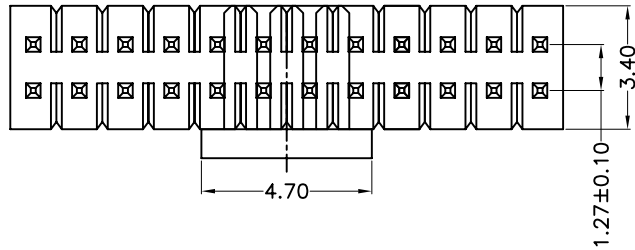

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	 Dongguan Lanbo Electronics Technology Co., Ltd DESCRIPTION: 1.27mm Pin Header R/A SMT Type PART NO: PHRDSM127-XXG-3853CR	SIZE A4
E			Ken	.X=±0.20 .XX=±0.15			
D			CHECKED:	UNIT: MM			
C			Lily Chou	SCALE: 1:1			
B			APPROVAL:	SHEET: 1 / 1			
A	03-Mar-2023	(PC0001)	Ken	Chao Peng	PROJECTION:		
REV	DATE	FILE	BY				