

Specifications:





Current rating:2.0A AC/DC  
 Voltage rating:250V AC/DC  
 Contact resistance:20m ohm max.  
 Withstanding Voltage:500V AC/minute  
 Insulation resistance:1000M ohm min.  
 Temperature Rating:-40°C ~ +105°C

Materials:

Insulator:High Temp. Plastic(Nylon 6T UL94V-0)  
 Color:Black  
 Contact:Copper Alloy  
 Plating:Gold Plated

How To Order

PHSM20-XXG-BX-CR

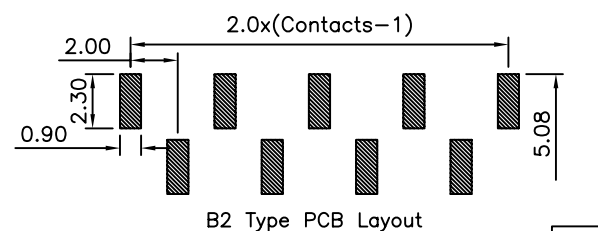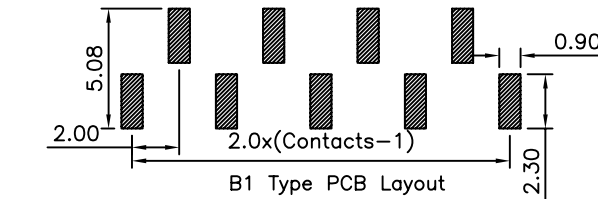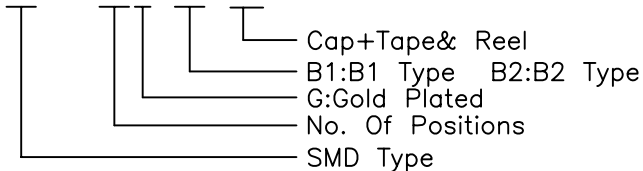

RoHS Compliant

F				DRAWN: Ken
E				
D				CHECKED: Lily Chou
C				
B				APPROVAL: Chao Peng
A	01-SEP-2015	(PC0001)	Ken	
REV	DATE	FILE	BY	

GENERAL TOLERANCE: .X=±0.20 .XX=±0.15
UNIT: MM
SCALE: 1:1
SHEET: 1 / 1
PROJECTION:

	DESCRIPTION: 2.0mm Pin Header Single Row Straight SMT Type
	PART NO: PHSM20-XXG-BX-CR

SIZE <b>A4</b>
-------------------