

Dimension :

Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B		A	B
2	5.58	2.54	22	56.38	53.34	12	30.98	27.94	32	81.78	78.74
3	8.12	5.08	23	58.92	55.88	13	33.52	30.48	33	84.32	81.28
4	10.66	7.62	24	61.46	58.42	14	36.06	33.02	34	86.86	83.82
5	13.20	10.16	25	64.00	60.96	15	38.60	35.56	35	89.40	86.36
6	15.74	12.70	26	66.54	63.50	16	41.14	38.10	36	91.94	88.90
7	18.28	15.24	27	69.08	66.04	17	43.68	40.64	37	94.48	91.44
8	20.82	17.78	28	71.62	68.58	18	46.22	43.18	38	97.02	93.98
9	23.36	20.32	29	74.16	71.12	19	48.76	45.72	39	99.56	96.52
10	25.90	22.86	30	76.70	73.66	20	51.30	48.26	40	102.10	99.06
11	28.44	25.40	31	79.24	76.20	21	53.84	50.80			

Specifications:

Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m Ohm.Max.
 Insulation Resistance:1,000M Ohm.Min.
 Withstanding Voltage:600V AC/Minute
 Operating Temperature Range:-40°C To +105°C
 Material and Finish:

Insulator: High Temp.Plastic(PBT UL94V-0)

Insulator Color:Black

Contact: copper Alloy

Plating: Gold Plated

How To Order:

PSR254-XXX-85

Plastic Height 8.5mm


G:Gold Plated

SG>Selective Gold Plated

T:Tin Plated

No. Of Contact

R: Right Angle

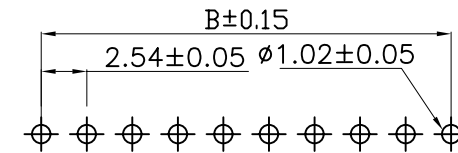

P.C.B. Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.54mm PCB Socket Single Row Right Angle Type	SIZE A4
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM			
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PART NO:	PSR254-XXX-85	
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					