




Dimension :

| Pos | Dim A | Dim B | Pos | Dim A | Dim B | Pos | Dim A | Dim B |
|-----|-------|-------|-----|-------|-------|-----|-------|-------|
| 2 | 4.50 | 2.00 | 10 | 20.50 | 18.00 | 23 | 46.50 | 44.00 |
| 3 | 6.50 | 4.00 | 11 | 22.50 | 20.00 | 25 | 50.50 | 48.00 |
| 4 | 8.50 | 6.00 | 12 | 24.50 | 22.00 | 28 | 56.50 | 54.00 |
| 5 | 10.50 | 8.00 | 13 | 26.50 | 24.00 | 30 | 60.50 | 58.00 |
| 6 | 12.50 | 10.00 | 14 | 28.50 | 26.00 | 33 | 66.50 | 64.00 |
| 7 | 14.50 | 12.00 | 15 | 30.50 | 28.00 | 35 | 70.50 | 68.00 |
| 8 | 16.50 | 14.00 | 18 | 36.50 | 34.00 | 38 | 76.50 | 74.00 |
| 9 | 18.50 | 16.00 | 20 | 40.50 | 38.00 | 40 | 80.50 | 78.00 |

Specifications:
 Current rating:2.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:20m ohm max.
 Withstanding Voltage:500V AC/minute
 Insulation resistance:1000M ohm min.
 Operating Temperature Rating:-40°C ~ +105°C

Materials:
 Insulator:High Temp Plastic (Nylon 9T UL94V-0)
 Insulator Color:Black
 Contact:Phosphor Bronze
 Finish:Gold Plated
 Package:700pcs/Reel

How To Order
 PSSM20-XXG-BX-PCR

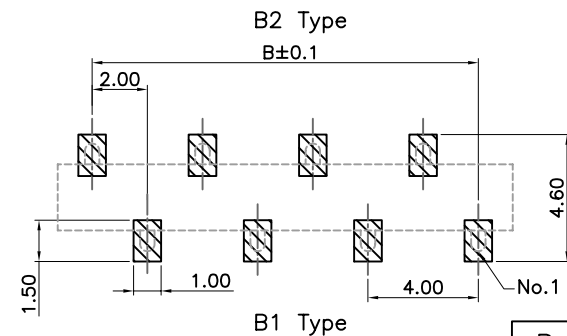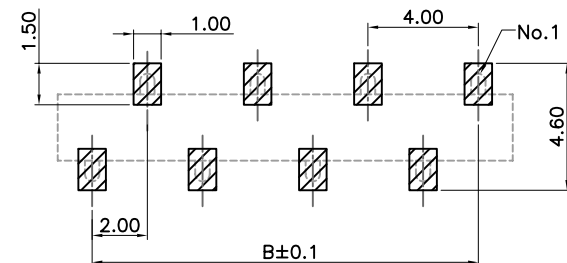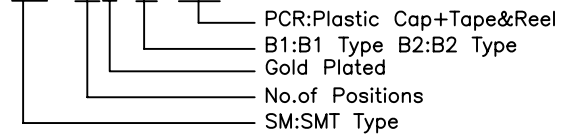

RoHS Compliant

| | | | | | | | | |
|-----|-------------|----------|-----------|-----------------------|--------------------|-------------------|--|-------------------|
| F | | | | DRAWN: | GENERAL TOLERANCE: | | DESCRIPTION: 2.0mm PCB Socket Single Row SMD Type | SIZE A4 |
| E | | | Ken | .X=±0.20 .XX=±0.15 | | | | |
| D | | | CHECKED: | UNIT: MM | | | | |
| C | | | Lily Chou | SCALE: 1:1 | | | | |
| B | | | APPROVAL: | SHEET: 1 / 1 | PART NO: | PSSM20-XXG-BX-PCR | | |
| A | 10-Nov-2015 | (PC0001) | Ken | Chao Peng | PROJECTION: | | | |
| REV | DATE | FILE | BY | | | | | |