


Specifications:
 Current Rating:1.5A AC/DC
 Voltage Rating:125V AC/DC
 Contact Resistance:20m Ohm Min
 Insulation Resistance:500M Ohm Max
 Withstanding Voltage:1000V AC/Minute
 Operating Temperature Range:-40°C to +85°C
 Material And Finish:
 Insulator:High Temp.Plastic (UL94V-0)
 Insulator Color:Black
 Contact:Phosphor Bronze Selective Plated Over Nickel
 Shell:Copper Alloy Nickel Plated
 How To Order
 RJDRM-8P8C-LYRG

Right LED Green ;Left LED Yellow
 No. Of Contacts
 No. Of Positions
 Double Part R/A Metal Shielding

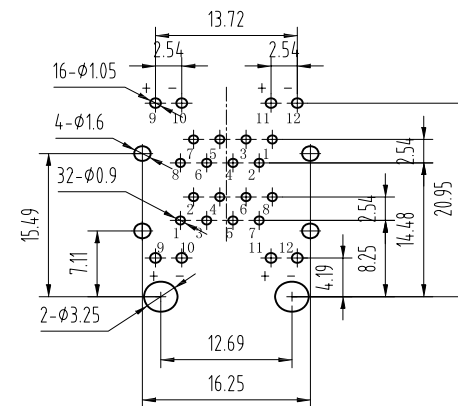

PC Board Layout
 Component Side Shown

RoHS Compliant

				DRAWN: Jeremy Liu
				CHECKED: Jerry Chen
A	27-Oct-2016	(H0001)	Jeremy Liu	APPROVAL:
REV	DATE	FILE	BY	Mike Wu

GENERAL TOLERANCE:
 .X=±0.20
 .XX=±0.15

UNIT: MM
 SCALE: 1:1
 SHEET: 1 / 1

PROJECTION:



DESCRIPTION:
 8P8C Side Entry Led PCB Jack With Shielded

PART NO:
 RJDRM-8P8C-LYRG

SIZE
A4