


Specifications:

Current Rating:1.0A AC/DC
 Voltage Rating:125V AC/DC
 Contact Resistance:20m ohm max
 Insulation Resistance:1000M ohm max
 Withstanding Voltage:500V AC/minute
 Operating Temperature Range:-20°C To +85°C
 Material and Finish
 Insulator:High Temp Plastic(LCP UL94-0)
 Standard Color:Black
 Contact:Phosphor Bronze
 Plating:Gold Plated on Contact Area;
 Tin Plated on Solder Tail.

How To Order:

SATPRSM127-22SG-A

With Metal
 SG: Selective Gold plated
 No. of Positions
 SMD Type
 R:Right Angle Type

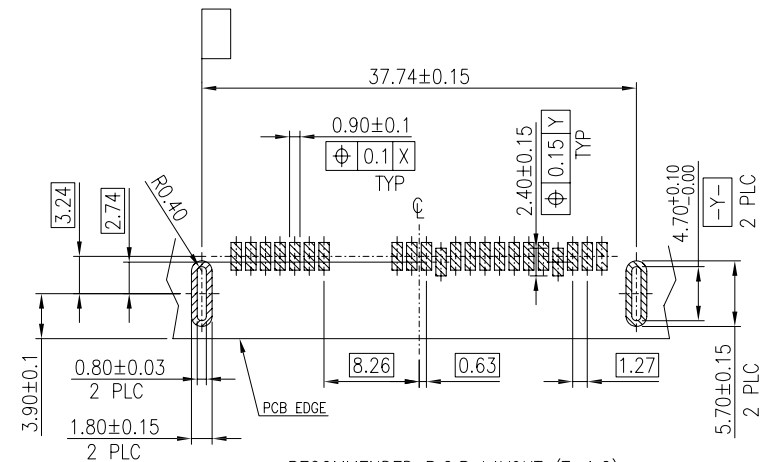

RECOMMENDED P.C.B LAYOUT (T=1.2)

RoHS Compliant

E				DRAWN: Ken Wang
D				CHECKED: Lily Chou
C				APPROVAL: Chao Peng
B				
A	08-Oct-2016	(H0001)	Ken Wang	
REV	DATE	FILE	BY	

GENERAL TOLERANCE: .X=±0.2 .XX=±0.15
UNIT: MM
SCALE:2:1
SHEET: 1 / 1
PROJECTION:

DESCRIPTION: SATA 22P Plug R/A SMT Type Connector	SIZE A4
PART NO: SATPRSM127-22SG-A	