


Specifications:

Current Rating:1.0A AC/DC  
 Voltage Rating:125V AC/DC  
 Contact Resistance:20m ohm max  
 Insulation Resistance:1000M ohm max  
 Withstanding Voltage:500V AC/minute  
 Operating Temperature Range:-20°C To +85°C  
 Material and Finish  
 Insulator:High Temp Plastic(LCP UL94-0)  
 Standard Color:Black  
 Contact:Phosphor Bronze  
 Plating:Gold Plated on Contact Area;  
 Tin Plated on Solder Tail.

How To Order:



SATPRSM127-22SGXX-H50

- Height 5.0mm
- 15: Selective Gold plated 15u:
- 30: Selective Gold plated 30u:
- SG: Selective Gold plated
- No. of Positions
- SMD Type
- R:Right Angle Type

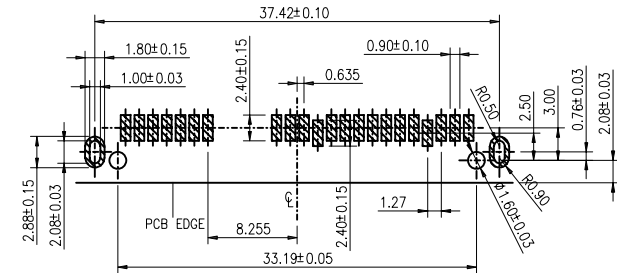

RECOMMEND PCB LAYOUT (T=1.5)  
 PCB TOLERANCE:±0.05

RoHS Compliant

				DRAWN: Ken Wang	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: SATA 22P Plug R/A SMT Type Connector(H=5.0mm)	SIZE <b>A4</b>
E				CHECKED: Lily Chou	UNIT: MM SCALE:2:1			
D				APPROVAL: Chao Peng	SHEET: 1 / 1	PART NO: SATPRSM127-22SGXX-H50		
C					PROJECTION: 			
B								
A	08-Oct-2020	(H0001)	Ken Wang					
REV	DATE	FILE	BY					