

DRE Specifications:

Current Rating:1.5A AC/DC

Voltage Rating:125V AC/DC

Contact Resistance:30m ohm max

Insulation Resistance:1000M ohm max

Withstanding Voltage:500V AC/minute

Operating Temperature Range:-40°C To +125°C

Material and Finish

Insulator:High Temp Plastic(LCP UL94-0)

Standard Color:Black

Contact:Phosphor Bronze

Plating:Gold Plated on Contact Area;

Tin Plated on Solder Tail.


How To Order:

SATS127-22-H67

H67:Height 6.7mm

No. of Positions

S:Socket

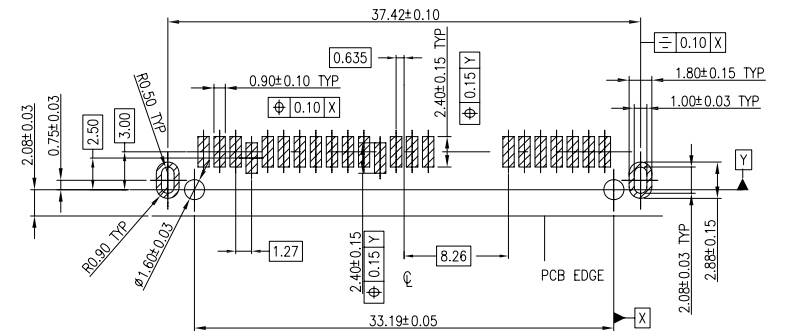

RECOMMEND P.C.B LAYOUT (T=1.2)

RoHS Compliant

				DRAWN: Ken Wang	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: 1.27mm SATA Socket R/A SMT Type	SIZE A4
E				CHECKED: Lily Chou	UNIT: MM			
D				APPROVAL: Chao Peng	SCALE:2:1	PART NO: SATS127-22-H67		
C					SHEET: 1 / 1			
B					PROJECTION:			
A	14-Oct-2016	(H0082)	Ken Wang					
REV	DATE	FILE	BY					