


**Specifications:**


Current Rating:0.5 AC/DC  
 Voltage Rating:50V AC/DC  
 Contact Resistance:100m Ohm. Max.  
 Insulation Resistance:1,000M Ohm. Min.  
 Withstanding Voltage:500V AC For One Minute  
 Operating Temperature Range:-25°C To +85°C  
 Material And Finish:  
 Insulator:High Temp Plastic (LCP UL94V-0)  
 Insulator Color:Black  
 Contact:beryllium copper  
 Plating:Gold Plated Over Nickel



**How To Order**

SIM1SM254-06G-ET15-TR

- Tape & Reel
- Base Height 1.5mm
- Row Pitch 7.62mm
- Smart Card/Sim Card
- Without Switch/Cover
- Gold Plated
- No. of Contacts
- SM1 Type

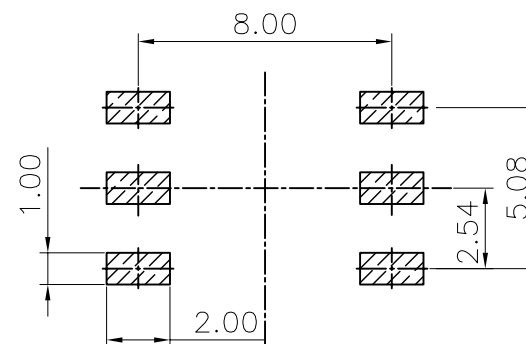

PCB LAYOUT TOP VIEW  
TOLERANCE ±0.05

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: Smart Card/Sim Card	SIZE <b>A4</b>
E			Jeremy Liu	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Jeremy Liu	SCALE:				
B			APPROVAL:	SHEET: 1 / 1	PART NO:			
A	24-DEC-2015	(PUR160)	Jeremy Liu	Mike Wu	PROJECTION:	SIM1SM254-06G-ET15-TR		
REV	DATE	FILE	BY					