


Specifications:

Current rating: 3.0A AC, DC
 Voltage rating: 30V AC, DC
 Contact resistance: 30m ohm max.
 Insulation resistance: 1,000M ohm min.
 Withstanding voltage: 600V AC/minute
 Operating Temperature range: -40°C to +85°C
 Material:

Insulator: High Temp Plastic (UL94V-0)
 Standard Color:Black
 Contact: Copper Alloy
 Finish:Selective Gold Plated

How To Order
 UBSAR-04-XX

— WH:White
 — BK:Black
 — No. Of Positions
 — Socket A R/A Type

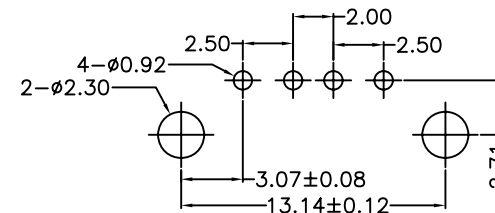

PC BOARD LAYOUT

RoHS Compliant

				DRAWN: Huali
				CHECKED: Lily Chou
A	22-Aug-2012	(H0040)	Huali	APPROVAL: Ken Wu
REV	DATE	FILE	BY	

GENERAL TOLERANCE: .X=±0.2 .XX=±0.15
UNIT: MM
SCALE:1:1
SHEET: 1 / 1
PROJECTION:

DESCRIPTION: USB A Socket R/A 4P Dip Type	SIZE A4
PART NO: UBSAR-04-XX	