



Specifications:
 Current Rating:1.8A AC/DC
 Voltage Rating:100V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1,00M ohm. min.
 Withstanding Voltage:750V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Material And Finish
 Insulator:PBT (UL94V-0)
 Contact:Brass
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:SPCC,Nickel Plated
 How To Order
 UBSARD1-18-XX



WH:White (Standard)
 BU:Bule
 No Of Positions
 A Type R/A Socket

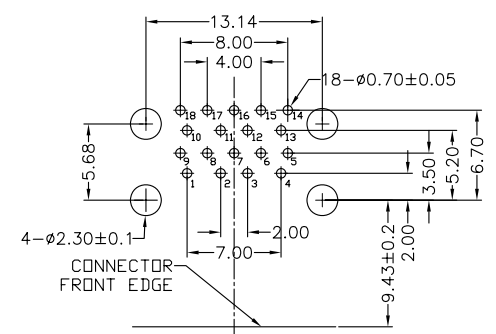

PCB LAYOUT (TOP VIEW)

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: USB 3.0 A Socket 18P R/A Type	SIZE A4
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	UBSARD1-18-XX		
A	18-Mar-2016	(H0098)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					