


1

2

3

4

5



Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:30m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:-40°C ~ +105°C

Material and Finish

Insulator:LCP (UL94V-0)

Contact:Brass

Plating:Gold Plated on Contact Area,

Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated

How To Order

UBSARSM-04-XX-XX





Standard Selective Plated

15:Selective Gold Plated 15u"

30:Selective Gold Plated 30u"

BK:Black

WH:White

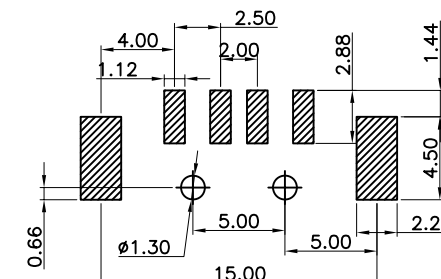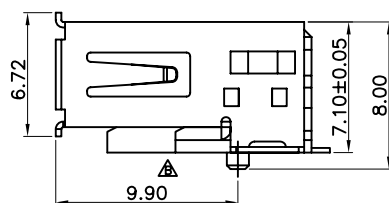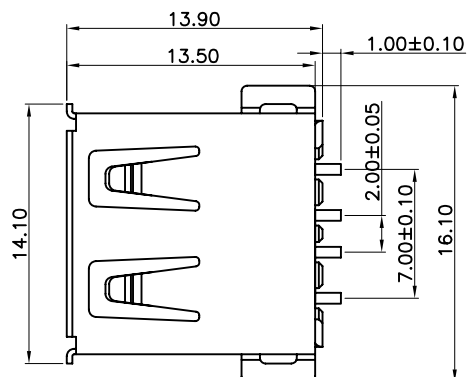

PCB Layout

(T=1.6±0.10; Ref)

RoHS Compliant

				DRAWN: Jack Zhou	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: USB A Sokcet 4P R/A SMT Type	SIZE A4
E				CHECKED: Ken Wang	UNIT: MM			
D				APPROVAL: Make Hu	SCALE:2:1	PART NO: UBSARSM-04-XX-XX		
C					SHEET: 1 / 1			
B				PROJECTION:				
A	04-Sep-2013	(H0001)	Jack Zhou					
REV	DATE	FILE	BY					