



1 2 3 4 5

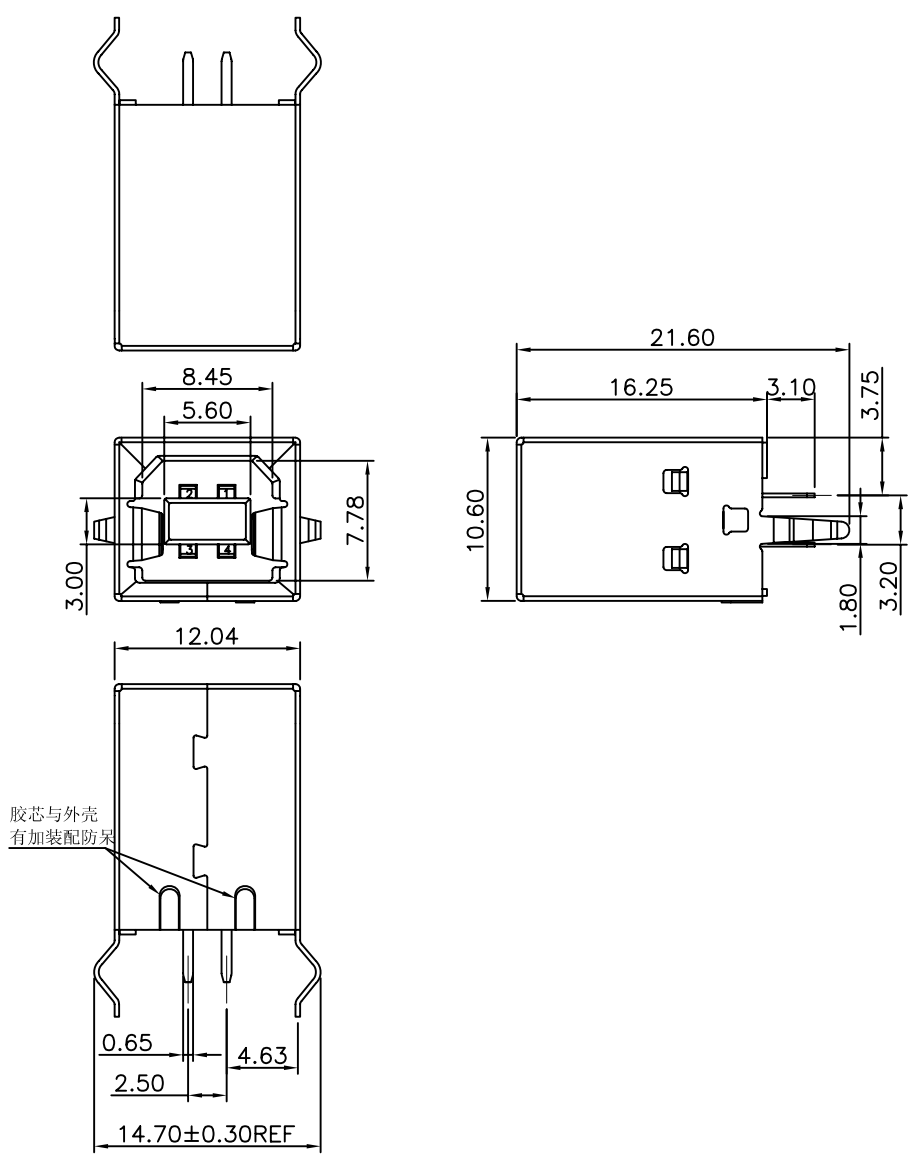

Specifications:  
 Current Rating:1.0A AC/DC  
 Voltage Rating:30V AC/DC  
 Contact Resistance:20m ohm.Max.  
 Insulation Resistance:1000M ohm.Min.  
 Withstanding Voltage:750V AC/Minute  
 Operating Temperature Range:-40°C To +105°C  
 Material and Finish:  
 Insulator:PBT (UL94V-0)  
 Contact:Copper Alloy  
 Plating:Gold Plated on Contact Area,  
 Tin Plated on Solder Tail.  
 Shell:Copper Alloy,Nickel Plated  
 How To Order  
 UBSBV-04-XX-XX

Standard Selective Gold Plated  
 30:Gold Plated 30u"  
 WH:White BK:Black  
 No Of Contacts  
 BV:B Type Straight



RoHS Compliant

				DRAWN: Leo	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15			
D				CHECKED: Jeremy Liu	UNIT: MM		DESCRIPTION: USB B TYPE PCB FEMALE STRAIGHT	SIZE A4
C					SCALE:			
B				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: UBSBV-04-XX-XX		
A	27-Nov-2014	(H0084)	Leo		PROJECTION:			
REV	DATE	FILE	BY					