






1

2

3

4

5

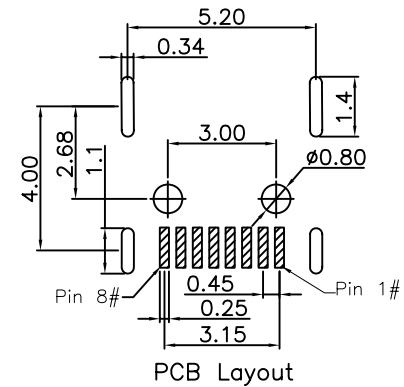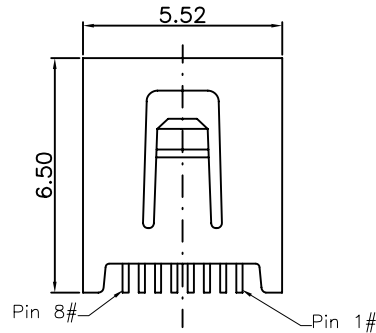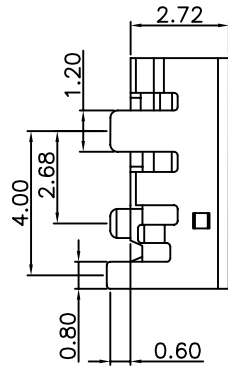

Specifications:

Current Rating:1.0A AC/DC  
 Voltage Rating:30V AC  
 Contact Resistance:50m ohm. Max.  
 Insulation Resistance:100M ohm. min.  
 Withstanding Voltage:100V AC For One Minute  
 Operating Temperature Range:-40°C ~ +105°C  
 Material and Finish  
 Insulator:High Temp. Plastic (LCP UL94V-0)  
 Insulator Color:Black  
 Contact:Phosphor Bronze  
 Plating:Gold Plated  
 Shell:Brass,Nickel Plated

How To Order

UBSRSM-08A3-TR

TR:Tape & Reel  
 A3 Type  
 No. Of Positions  
 R/A SMT Type

RoHS Compliant

E				DRAWN:	Jack Zhou
D				CHECKED:	Ken Wang
C				APPROVAL:	Jack Zhou
B					Make Hu
A	04-Sep-2016	(H0001)	Jack Zhou		
REV	DATE	FILE	BY		

GENERAL TOLERANCE:	.X=±0.2 .XX=±0.15
UNIT: MM	
SCALE:2:1	
SHEET: 1 / 1	
PROJECTION:	

DESCRIPTION:	Mini USB Sokcet 8P R/A SMT Type
PART NO:	UBSRSM-08A3-TR

SIZE	A4
------	----