


Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:125V AC,DC
 Contact resistance:20m ohm.Max
 Insulation resistance:100M ohm.Min
 Withstanding voltage:250V AC/minute
 Operating temperature range:-40°C~+85°C
 Material:
 Insulator:High Temp. Plastic(Nylon 6T UL94V-0)
 Insulator Color:Beige
 Contact:Brass
 Plated:Gold Plated

How To Order:
 WF1RSM125-XXG
 G:Gold Plated
 No.Of Position
 R/A SMT Type

CKT.	DIM A	DIM B	DIM C	CKT.	DIM A	DIM B	DIM C
2	1.25	7.65	7.50	10	11.25	17.65	17.50
3	2.50	8.90	8.75	11	12.50	18.90	18.75
4	3.75	10.15	10.00	12	13.75	20.15	20.00
5	5.00	11.40	11.25	13	15.00	21.40	21.25
6	6.25	12.65	12.50	14	16.25	22.65	22.50
7	7.50	13.90	13.75	15	17.50	23.90	23.75
8	8.75	15.15	15.00	20	23.75	30.15	30.00
9	10.00	16.40	16.25	30	36.25	42.65	42.50

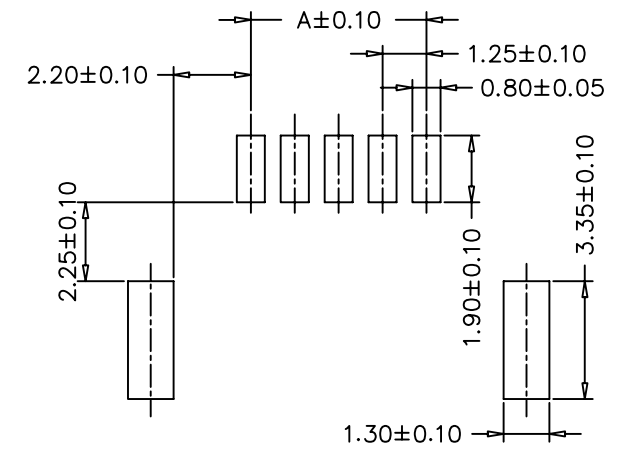

PCB LAYOUT

RoHS Compliant

F				DRAWN:	Ken	GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15		DESCRIPTION:	1.25mm Wafer Straight SMT Type	SIZE
E				CHECKED:	Lily Chou	UNIT: MM					
D				APPROVAL:	Chao Peng	SCALE: 1:1	SHEET: 1 / 1	PART NO:	WF1RSM125-XXG	A4	
C						PROJECTION:					
B	13-Mar-2020	Amend Dim C	Ken	DATE	FILE	BY					
A	01-SEP-2009	(H0043)	Ken								
REV	DATE	FILE	BY								