

Specifications:
 Current Rating:7.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:10mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1500V AC/minute
 Operating Temperature Range:-40°C~+105°C
 Material And Finish:


Insulator:Nylon 66 (UL94V-2)
 Insulator Color:Transparence White
 Contact:Brass
 Plating:Gold Plated

How to Order
 WF1V396-XXG-01

Without Lock
 Gold Plated
 No.Of Positions
 Straight Type

Dimension:

Pos	Dim. A	Dim. B	Pos	Dim. A	Dim. B	Pos	Dim. A	Dim. B
2	3.96	8.03	9	31.68	35.75	16	59.40	63.47
3	7.92	11.99	10	35.64	39.71	17	63.36	67.43
4	11.88	15.95	11	39.60	43.67	18	67.32	71.39
5	15.84	19.91	12	43.56	47.63	19	71.28	75.35
6	19.80	23.87	13	47.52	51.59	20	75.24	79.31
7	23.76	27.83	14	51.48	55.55			
8	27.72	31.79	15	55.44	59.51			

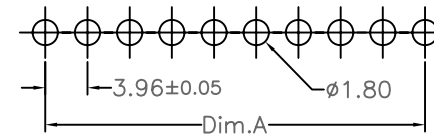

PCB LAYOUT

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:	HOYATO 东莞好亚通电子厂 Connector supplies	DESCRIPTION:	SIZE
E			Ken	.X=±0.20 .XX=±0.15				
D				CHECKED:	UNIT: MM	3.96mm Wafer Straight Type	A4	
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PART NO:	WF1V396-XXG-01	
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					