
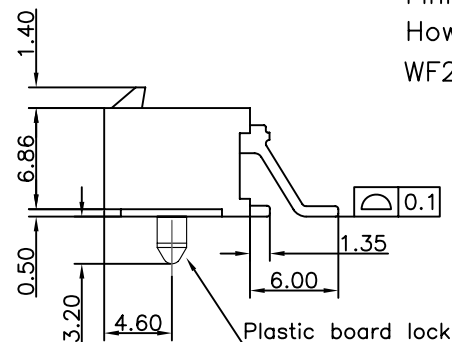
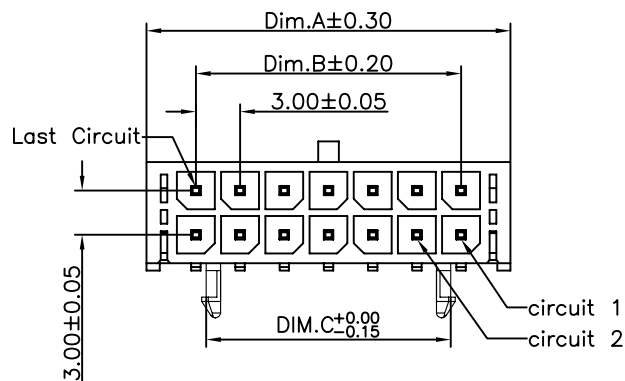


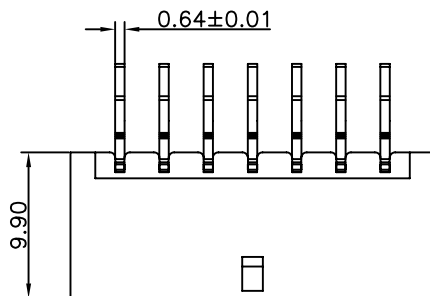

Specifications:

Current Rating:5.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:10m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:AC 1500V AC/minute

Operating Temperature Range:-25°C ~ +105°C

Material and Finish

Insulator:High Temp. Plastic (Nylon 9T UL94V-0)

Insulator Color:Black

Contact:Copper Alloy

Finish:Tin Plated

How to Order



WF2RSM30-XXT

Tin Plated

No.Of Positions


R/A SMT Type

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
2	6.7	—	2.9	14	24.7	18.0	16.6
4	9.7	3.0	2.9	16	27.7	21.0	19.6
6	12.7	6.0	2.9	18	30.7	24.0	22.6
8	15.7	9.0	7.6	20	33.7	27.0	25.6
10	18.7	12.0	10.6	22	36.7	30.0	28.6
12	21.7	15.0	13.6	24	39.7	33.0	31.6

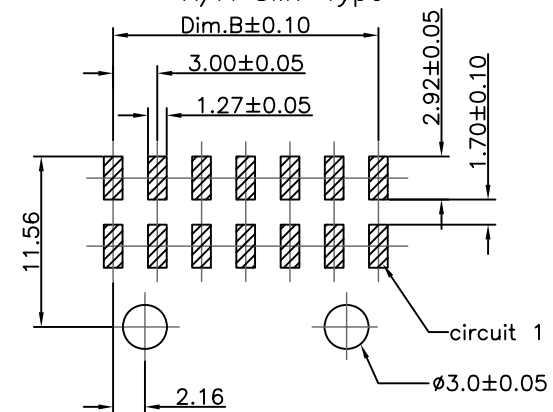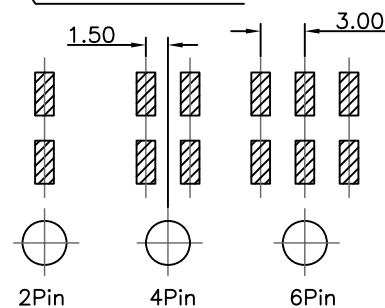

PCB Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 HOYATO Connector supplies		
E								
D				CHECKED: Lily Chou	UNIT: MM	DESCRIPTION: 3.0mm Power Wafer R/A SMT Type	SIZE A4	D
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 2	PART NO: WF2RSM30-XXT		
A	01-SEP-2013	(PC0001)	Ken		PROJECTION: 			
REV	DATE	FILE	BY					